

DAY-BRITE®

22

DA






the finest in...

COMMERCIAL AND INDUSTRIAL LIGHTING

DAY-BRITE LIGHTING, INCORPORATED

ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA

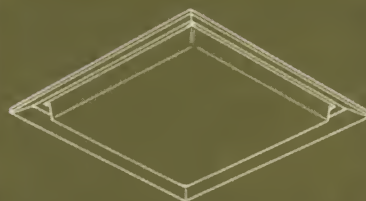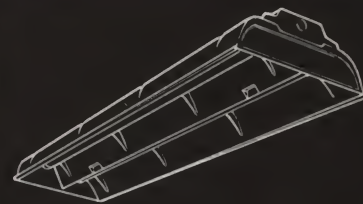

Lighting and
air conditioning are
combined in this new
courtroom. Fixtures
are Day-Brite aluminum
PARAFLO® Troffers.



OUR PHILOSOPHY

"Always build better fixtures for less money.

Always give better values for the buyer's dollar.

*Always be able to show...by complete competitive
comparison...that DAY-BRITE fixtures are
...Decidedly Better"*

Note excellent linotype keyboard
lighting and even overall illumina-
tion in this composing room of a big

city daily newspaper. Apertured
Day-Brite CFI-25® Industrial fixtures
furnish 125 footcandles.



A series of Day-Brite Deep-Baffled Derby
Downlights highlight decorative plants and
appointments in this new bank lobby. Area
forms pleasing contrast to general banking
area (background) lighted by Day-Brite
recessed 4 by 4 Daylume.



DAY-BRITE LIGHTING, INCORPORATED
















ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA

DAY-BRITE

COMMERCIAL FLUORESCENT LIGHTING

| SURFACE MOUNTED | | Page |
|-------------------------------------------------------------------------------------|-----------------------------------------------|------------|
|  | DAYLUME® | 4, 5 |
|  | FAIRVIEW® | 6 |
|  | HOLIDAY | 7 |
|  | PARAWING® | 7 |
|  | PLEXOLINE® | 7 |
|  | RANGER® | 7 |
| SUSPENSION MOUNTED | | |
|  | LUVEX® | 8 |
|  | VELVALUME® | 8 |
| SPECIAL PURPOSE | | |
|  | HOSPITAL BED LIGHT UTILITY UNIT | 9, 20 9 |
|  | CORRIDOR UNITS | 9 |
|  | COVE LIGHTING | 9 |
|  | STRIP LIGHTING | 10 |
|  | COMMERCIAL HANGERS | 11 |
| RECESSED | | |
|  | AIR DIFFUSING TROFFERS AND MOBILEX® | 12, 13 |
|  | CLEARTEX® PLASTIC TROFFERS AND MOBILEX® | 14 |
|  | CRESTEX® PLASTIC TROFFERS AND MOBILEX® | 15 |








ILLUSTRATED INDEX

| RECESSED | | Page |
|--------------------------------------------------------------------------------------|--------------------------------------------------|------------|
|  | DAYTEX® PLASTIC TROFFER AND MOBILEX® | 16 |
|  | 6024-DB PLASTIC CONTROLSENS* MOBILEX® | 16 |
|  | PLASTIC EGG-CRATE TROFFERS AND MOBILEX® | 16 |
|  | CORNING No. 70 GLASS TROFFERS AND MOBILEX® | 17 |
|  | 9015-DB GLASS CONTROLSENS* TROFFERS | 17 |
|  | 6011-DB PLASTIC CONTROLSENS* TROFFERS | 17 |
|  | PARALOUVER® TROFFERS AND MOBILEX® | 17 |
| TROFFER AND MOBILEX CEILING SYSTEMS | | 18 |
| COMMERCIAL INCANDESCENT LIGHTING | | |
| RECESSED | | |
|  | UNI-FRAME® | 19 |
|  | DERBY DOWNLIGHTS | 20 |
| SPECIAL PURPOSE | | |
|  | ACCENT UNITS | 19 |
|  | CANOPY UNITS | 20 |
|  | NITE LIGHTS | 20 |
|  | EXIT SIGNS | 24 |
| INDUSTRIAL FLUORESCENT LIGHTING | | |
|  | CFI® (Comfort For Industry) | 21, 22, 23 |
|  | VAPOR-TIGHT | 23 |
| INDUSTRIAL HANGERS AND ACCESSORIES | | 23 |

*©Holophane Co., Inc.

COMMERCIAL FLUORESCENT LIGHTING


SURFACE MOUNTED

| | | |
|-----------------------------------------|--------|---------------------------------------------------------------------------------------|
| DAYLUME® | 4, 5 |  |
| FAIRVIEW® | 6 |  |
| HOLIDAY | 7 |  |
| PARAWING® | 7 |  |
| PLEXOLINE® | 7 |  |
| RANGER® | 7 |  |
| SUSPENSION MOUNTED | | |
| LUVEX® | 8 |  |
| VELVALUME® | 8 |  |
| SPECIAL PURPOSE | | |
| HOSPITAL BED LIGHT | 9, 20 |  |
| UTILITY UNIT | 9 |  |
| CORRIDOR UNITS | 9 |  |
| COVE LIGHTING | 9 |  |
| STRIP LIGHTING | 10 |  |
| COMMERCIAL HANGERS | 11 |  |
| RECESSED | | |
| AIR DIFFUSING TROFFERS AND MOBILEX® | 12, 13 |  |
| CLEARTEX® PLASTIC TROFFERS AND MOBILEX® | 14 |  |
| CRESTEX® PLASTIC TROFFERS AND MOBILEX® | 15 |  |

*©Holophane Co., Inc.


RECESSED

| | | |
|--------------------------------------------------|------------|-------------------------------------------------------------------------------------|
| DAYTEX® PLASTIC TROFFER AND MOBILEX® | 16 |  |
| 6024-DB PLASTIC CONTROLS* | 16 |  |
| MOBILEX® PLASTIC EGG-CRATE TROFFERS AND MOBILEX® | 16 |  |
| CORNING NO. 70 GLASS TROFFERS AND MOBILEX® | 17 |  |
| 9015-DB GLASS CONTROLS* TROFFERS | 17 |  |
| 6011-DB PLASTIC CONTROLS* TROFFERS | 17 |  |
| PARALOVER® TROFFERS AND MOBILEX® | 17 |  |
| TROFFER AND MOBILEX CEILING SYSTEMS | 18 | |
| COMMERCIAL INCANDESCENT LIGHTING | | |
| RECESSED | | |
| UNI-FRAME® | 19 |  |
| DERBY DOWNLIGHTS | 20 |  |
| SPECIAL PURPOSE | | |
| ACCENT UNITS | 19 |  |
| CANOPY UNITS | 20 |  |
| NITE LIGHTS | 20 |  |
| EXIT SIGNS | 24 |  |
| INDUSTRIAL FLUORESCENT LIGHTING | | |
| CFI® (Comfort For Industry) | 21, 22, 23 |  |
| VAPOR-TIGHT | 23 |  |
| INDUSTRIAL HANGERS AND ACCESSORIES | 23 | |



COMMERCIAL FLUORESCENT LIGHTING

SURFACE MOUNTED

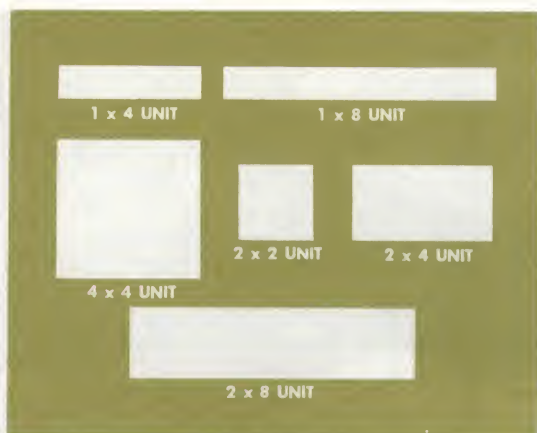

For recessed companion units, see pages 12 thru 17.

| Lamps | Dimensions | Catalog No. |
|-------|------------|-------------|
|-------|------------|-------------|

LUMATEX® PLASTIC

| | | |
|-------------------|------------------------------------------------------------------------|----------|
| Two 4-ft. R.S. | 11 ¹³ / ₁₆ " x 48 ⁵ / ₈ " | 1X42-741 |
| Four 4-ft. R.S.* | 11 ¹³ / ₁₆ " x 97 ³ / ₁₆ " | 1X84-741 |
| Two 2-ft. T.S. | 23 ¹ / ₄ " x 24 ⁵ / ₈ " | 2X22-391 |
| Four 2-ft. T.S. | 23 ¹ / ₄ " x 24 ⁵ / ₈ " | 2X24-391 |
| Two 4-ft. R.S. | 23 ¹ / ₄ " x 48 ⁵ / ₈ " | 2X42-791 |
| Four 4-ft. R.S. | 23 ¹ / ₄ " x 48 ⁵ / ₈ " | 2X44-791 |
| Four 4-ft. R.S.* | 23 ¹ / ₄ " x 97 ³ / ₁₆ " | 2X84-791 |
| Eight 4-ft. R.S.* | 23 ¹ / ₄ " x 97 ³ / ₁₆ " | 2X88-791 |
| Four 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X44-791 |
| Six 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X46-791 |
| Eight 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X48-791 |

PLASTIC EGG-CRATE LOUVERS

| | | |
|-------------------|------------------------------------------------------------------------|----------|
| Two 4-ft. R.S. | 11 ¹³ / ₁₆ " x 48 ⁵ / ₈ " | 1X42-744 |
| Four 4-ft. R.S.* | 11 ¹³ / ₁₆ " x 97 ³ / ₁₆ " | 1X84-744 |
| Two 2-ft. T.S. | 23 ¹ / ₄ " x 24 ⁵ / ₈ " | 2X22-394 |
| Four 2-ft. T.S. | 23 ¹ / ₄ " x 24 ⁵ / ₈ " | 2X24-394 |
| Two 4-ft. R.S. | 23 ¹ / ₄ " x 48 ⁵ / ₈ " | 2X42-794 |
| Four 4-ft. R.S. | 23 ¹ / ₄ " x 48 ⁵ / ₈ " | 2X44-794 |
| Four 4-ft. R.S.* | 23 ¹ / ₄ " x 97 ³ / ₁₆ " | 2X84-794 |
| Eight 4-ft. R.S.* | 23 ¹ / ₄ " x 97 ³ / ₁₆ " | 2X88-794 |
| Four 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X44-794 |
| Six 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X46-794 |
| Eight 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X48-794 |

CORNING PAT. 70 GLASS

| | | |
|-------------------|------------------------------------------------------------------------|----------|
| Two 4-ft. R.S. | 11 ¹³ / ₁₆ " x 48 ⁵ / ₈ " | 1X42-721 |
| Four 4-ft. R.S.* | 11 ¹³ / ₁₆ " x 97 ³ / ₁₆ " | 1X84-721 |
| Two 2-ft. T.S. | 23 ¹ / ₄ " x 24 ⁵ / ₈ " | 2X22-371 |
| Four 2-ft. T.S. | 23 ¹ / ₄ " x 24 ⁵ / ₈ " | 2X24-371 |
| Two 4-ft. R.S. | 23 ¹ / ₄ " x 48 ⁵ / ₈ " | 2X42-771 |
| Four 4-ft. R.S. | 23 ¹ / ₄ " x 48 ⁵ / ₈ " | 2X44-771 |
| Four 4-ft. R.S.* | 23 ¹ / ₄ " x 97 ³ / ₁₆ " | 2X84-771 |
| Eight 4-ft. R.S.* | 23 ¹ / ₄ " x 97 ³ / ₁₆ " | 2X88-771 |
| Four 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X44-771 |
| Six 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X46-771 |
| Eight 4-ft. R.S. | 45 ¹¹ / ₁₆ " x 48 ⁵ / ₈ " | 4X48-771 |

6011-DB PLASTIC CONTROLENS†

| | | |
|------------------|------------------------------------------------------------------------|----------|
| Two 4-ft. R.S. | 11 ¹³ / ₁₆ " x 48 ⁵ / ₈ " | 1H42-731 |
| Four 4-ft. R.S.* | 11 ¹³ / ₁₆ " x 97 ³ / ₁₆ " | 1H84-731 |

9015-DB GLASS CONTROLENS†

| | | |
|------------------|------------------------------------------------------------------------|----------|
| Two 4-ft. R.S. | 11 ¹³ / ₁₆ " x 48 ⁵ / ₈ " | 1X42-730 |
| Four 4-ft. R.S.* | 11 ¹³ / ₁₆ " x 97 ³ / ₁₆ " | 1X84-730 |

†@Holophane Co., Inc.

* Tandem 4-Ft. Rapid-Start




LUMATEX® PLASTIC



PLASTIC EGG-CRATE LOUVERS



CORNING PAT. 70 GLASS

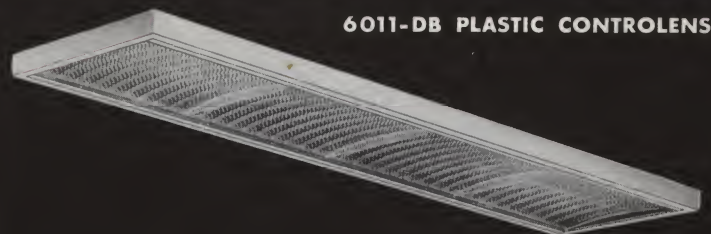

6011-DB PLASTIC CONTROLENS



9015-DB GLASS CONTROLENS

DAY-BRITE LIGHTING, INC.

ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA




**COMMERCIAL FLUORESCENT
LIGHTING**
SURFACE MOUNTED

FAIRVIEW®

Sleekly designed surface mounting fixtures with simple, pleasing lines and sharply contoured ends, compatible with contemporary interiors.

FAIRVIEW

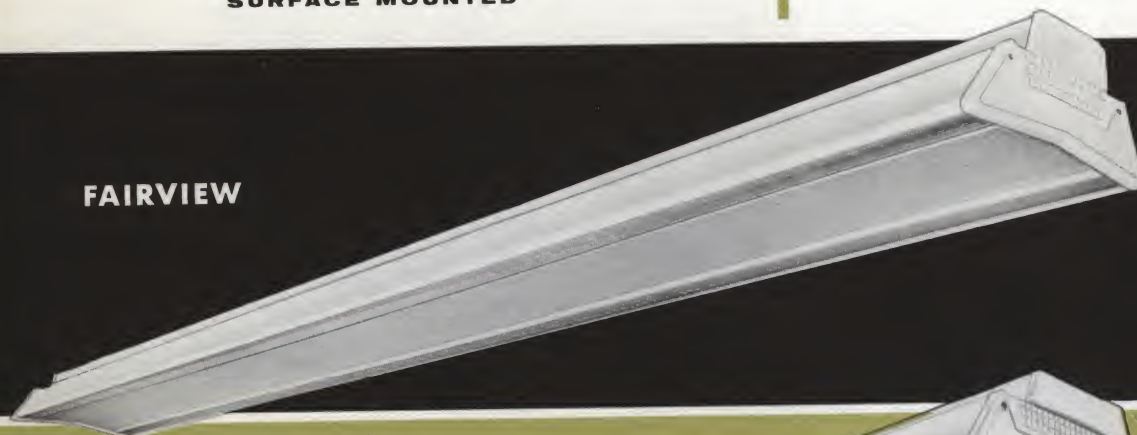


FAIRVIEW IV



One-piece 4-foot or 8-foot metal framed enclosure with translucent plastic side panels which interlock along sides with prismatic CLEARTEX® bottom panel. Enclosure has separable hinges and snap-latches which are finger actuated. All metal parts are rust-inhibited and finished in Hot-Bonded, Super-White enamel. Certified CBM ballasts, individually wired, provided with safety fuse and U/L Listed.

Patents Pending


| For Lamps | Length | Cat. No. |
|---------------------------------|--------|----------|
| FAIRVIEW | | |
| Two-Lamp, 2-foot T.S. | 25" | 47237-2 |
| Two-Lamp, 4-foot R.S. | 49" | 47237-4 |
| Two-Row (Tandem), 4-foot R.S. | 97" | 47237-8 |
| Two-Lamp, 8-foot Slimline | 97" | 97237-8 |
| FAIRVIEW IV | | |
| Four-Lamp Units | | |
| Four-Lamp, 4-foot R.S. | 49" | 47487-4 |
| Four-Row (Tandem), 4-foot R.S. | 97" | 47487-8 |
| Four-Lamp, 8-foot Slimline | 97" | 97487-8 |
| Two And Three-Lamp Units | | |
| Two-Lamp, 4-foot R.S. | 49" | 47287-4 |
| Two-Row (Tandem), 4-foot R.S. | 97" | 47287-8 |
| Two-Lamp, 8-foot Slimline | 97" | 97287-8 |
| Three-Lamp, 4-foot R.S. | 49" | 47387-4 |
| Three-Row (Tandem), 4-foot R.S. | 97" | 47387-8 |
| Three-Lamp, 8-foot Slimline | 97" | 97387-8 |

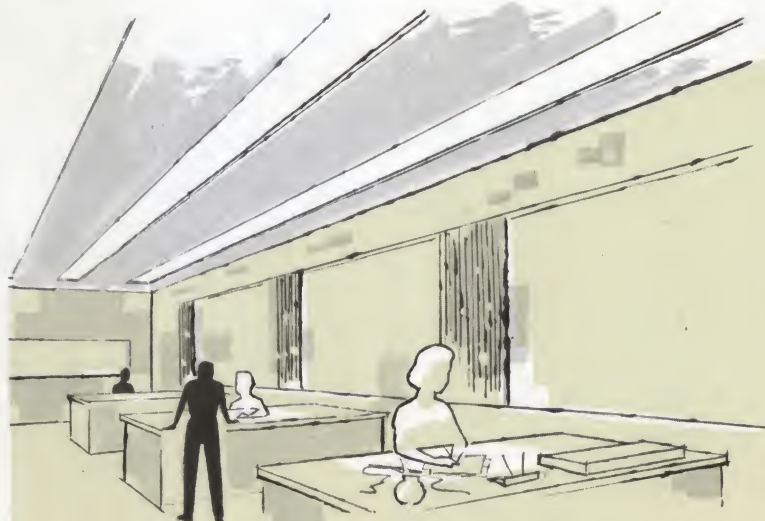



COMMERCIAL FLUORESCENT LIGHTING


SURFACE MOUNTED

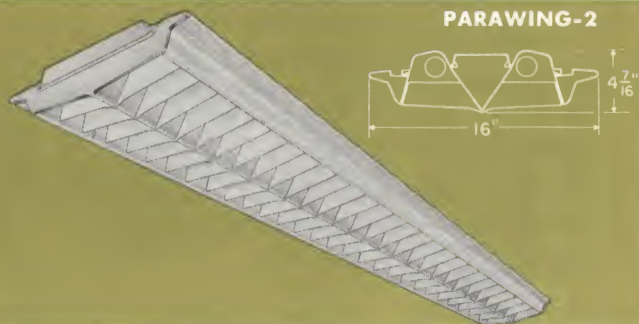

PARAWING-2®

Thin wing-like appearance of Parawing-2 makes this surface unit ideal for low ceiling areas in stores and offices. Combines white louver shielding with exclusive Day-Brite box-wing plastic side diffuser. Center louver, top plates, and inner Box-Wing wall combine to provide a parabolic shape for maximum efficiency and brightness control. U. L. Listed.

| For Lamps | Length | Cat. No. |
|---------------------------|---------|----------|
| Two 4-foot R.S. | 48 3/4" | 47256-4 |
| Four 4-foot (Tandem) R.S. | 96 3/4" | 47256-8 |
| Two 8-foot Slimline | 96 3/4" | 97256-8 |

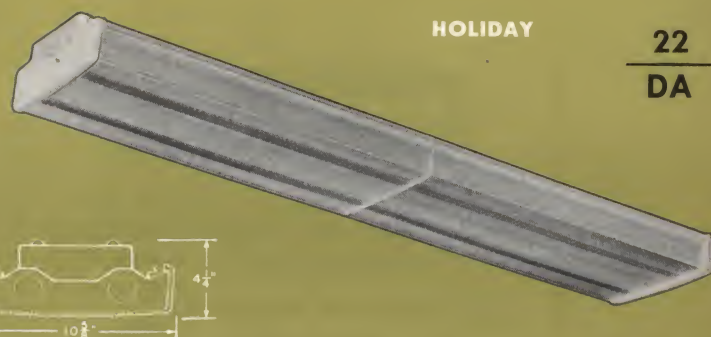

HOLIDAY


22
DA

HOLIDAY


The ultimate surface mounted fixture in both appearance and lighting comfort. Handsome molded prismatic Controlens* controls light distribution . . . provides sufficient upward light to illuminate surrounding ceiling area. Fixture chassis and Classic end plates in Hot-Bonded, Super-White enamel. U. L. Listed.

| For Lamps | Length | Cat. No. |
|---------------------------|---------|----------|
| Two 4-foot R.S. | 49 1/2" | 46500-4 |
| Four 4-foot (Tandem) R.S. | 97 1/2" | 46500-8 |

*©Holophane Co., Inc.

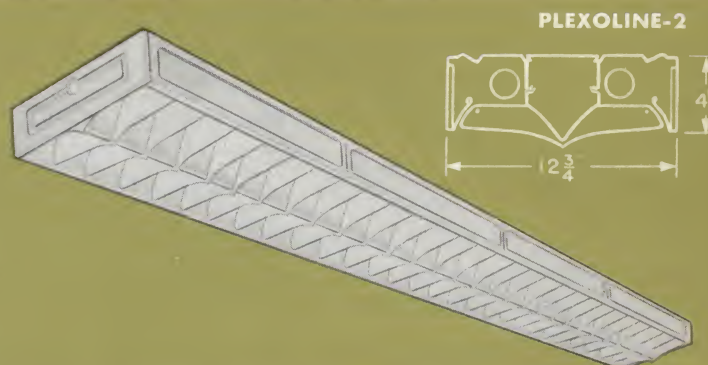

PLEXOLINE-2

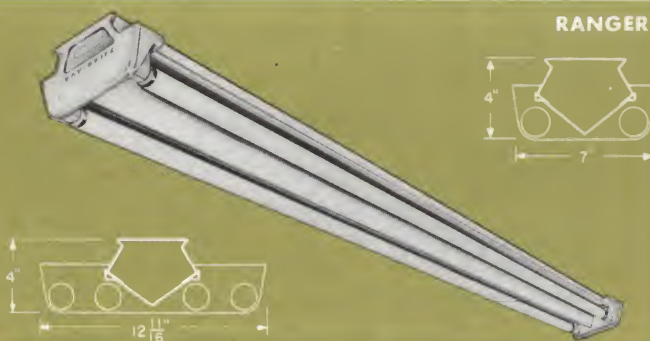

RANGER

RANGER


Die-formed and welded construction throughout for uniformity and structural stability. Entire chassis and socket housings finished in Super-White enamel, rust inhibited. CBM ballasts, U/L Listed. For supermarkets, department stores, and many other commercial installations.

RANGER-2

| For Lamps | Length | Cat. No. |
|-----------------------|-----------|----------|
| Two 4-foot R.S. | 49 13/16" | 45205-4 |
| Two 8-ft. 800-MA R.S. | 96" | 85205-8 |
| Two 8-ft. Slimline | 96" | 95205-8 |

RANGER-4

| For Lamps | Length | Cat. No. |
|------------------------|-----------|----------|
| Four 4-foot R.S. | 49 29/32" | 45405-4 |
| Four 8-ft. 800-MA R.S. | 96 3/16" | 85405-8 |
| Four 8-ft. Slimline | 96 3/16" | 95405-8 |

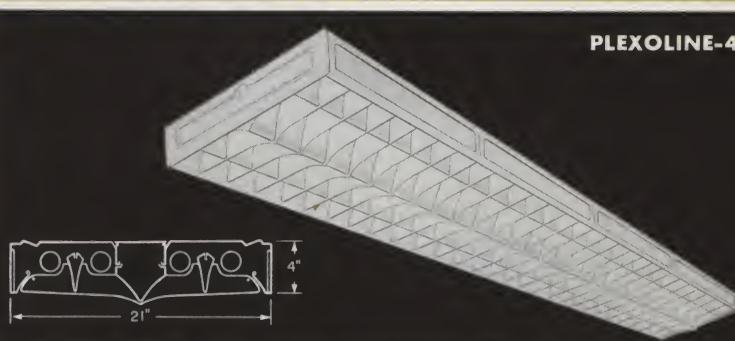

PLEXOLINE-4

PLEXOLINE®

Shallow surface mounted units with ribbed plastic side panels. All-metal interlocking louvers. Chassis and enclosure frames in Baked white enamel. White louvers are latch-supported. All units have solid tops. U. L. Listed.

PLEXOLINE-2

| For Lamps | Length | Cat. No. |
|---------------------|---------|----------|
| Two 4-foot R. S. | 48 7/8" | 47210-4 |
| Two row tandem R.S. | 96 7/8" | 47210-8 |
| Two 8-foot Slimline | 96 7/8" | 97200-8 |

PLEXOLINE-4

| For Lamps | Length | Cat. No. |
|---------------------|---------|----------|
| Four 4-ft. R. S. | 48 7/8" | 47410-4 |
| Four 8-ft. Slimline | 96 7/8" | 97400-8 |

*©Holophane Co., Inc.

DAY-BRITE LIGHTING, INC.


ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA

DAY-BRITE®



COMMERCIAL FLUORESCENT LIGHTING

SUSPENSION MOUNTED

LUVEX-2R

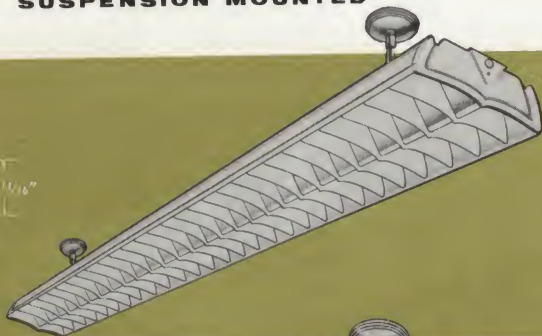

LUVEX-4R

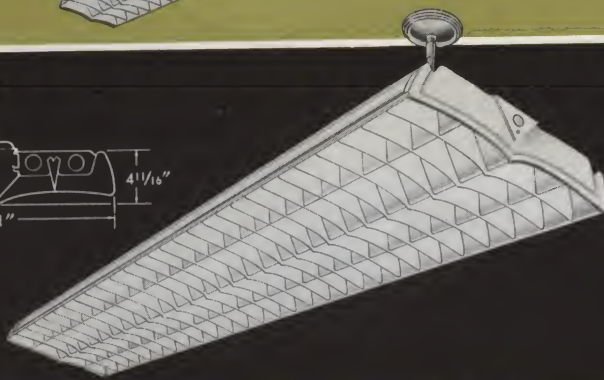

LUVEX-45



LUVEX-2PG




VELVALUME®

Luminous plastic indirect fixtures with extruded polystyrene plastic panels supplied in 4-foot lengths. Velvalume furnishes 77% of light upwards, 23% is diffused downward.

| For Lamps | Length | Cat. No. |
|------------------------|---------|----------|
| Two 4-foot R.S. | 48 1/2" | 46272-4 |
| Two row tandem R.S. | 96 1/2" | 46272-8 |
| Two 4-foot 800-MA R.S. | 48 1/2" | 86272-4 |
| Two 8-foot 800-MA R.S. | 96 1/2" | 86272-8 |

ADD HANGERS

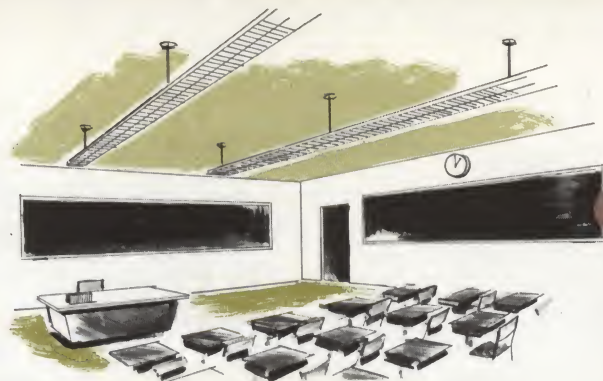

LUVEX®

Semi-direct, all-metal fixtures for suspension mounting. Especially adapted to high-level school and office lighting. Efficiency 83% or more. Finished in Hot-Bonded, Super-White enamel. CBM ballasts, U/L listed. Fixture include "A-J" adjustable hangers which are available in 8" and 24" lengths.

Pat. No. D-158782


| For Lamps | Hangers | Length | Cat. No. |
|------------------------|---------|---------|----------|
| LUVEX®-2R | | | |
| Two 4-foot R.S. | 8" | 48 1/2" | 46456-4 |
| Two row tandem R.S. | 8" | 96 1/2" | 46456-8 |
| Two 4-foot R.S. | 24" | 48 1/2" | 46457-4 |
| Two row tandem R.S. | 24" | 96 1/2" | 46457-8 |
| Two 8-foot Slimline | 8" | 96 1/2" | 96266-8 |
| Two 8-foot Slimline | 24" | 96 1/2" | 96267-8 |
| Two 4-foot 800-MA R.S. | 8" | 48 1/2" | 86266-4 |
| Two 8-foot 800-MA R.S. | 8" | 96 1/2" | 86266-8 |
| Two 4-foot 800-MA R.S. | 24" | 48 1/2" | 86267-4 |
| Two 8-foot 800-MA R.S. | 24" | 96 1/2" | 86267-8 |

| | | | |
|-------------------------|-----|---------|---------|
| LUVEX®-4R | | | |
| Four 4-foot R.S. | 8" | 48 1/2" | 46448-4 |
| Four 4-foot R.S. | 24" | 48 1/2" | 46449-4 |
| Four 8-foot Slimline | 8" | 96 1/2" | 96468-8 |
| Four 8-foot Slimline | 24" | 96 1/2" | 96469-8 |
| Four 4-foot 800-MA R.S. | 8" | 48 1/2" | 86466-4 |
| Four 8-foot 800-MA R.S. | 8" | 96 1/2" | 86466-8 |
| Four 4-foot 800-MA R.S. | 24" | 48 1/2" | 86467-4 |
| Four 8-foot 800-MA R.S. | 24" | 96 1/2" | 86467-8 |

| | | | |
|------------------------|-----|---------|---------|
| LUVEX®-45 | | | |
| Two 4-foot R.S. | 8" | 48 1/2" | 46278-4 |
| Two row tandem R.S. | 8" | 96 1/2" | 46278-8 |
| Two 4-foot R.S. | 24" | 48 1/2" | 46279-4 |
| Two row tandem R.S. | 24" | 96 1/2" | 46279-8 |
| Two 8-foot Slimline | 8" | 96 1/2" | 96278-8 |
| Two 8-foot Slimline | 24" | 96 1/2" | 96279-8 |
| Two 4-foot 800-MA R.S. | 8" | 48 1/2" | 86278-4 |
| Two 8-foot 800-MA R.S. | 8" | 96 1/2" | 86278-8 |
| Two 4-foot 800-MA R.S. | 24" | 48 1/2" | 86279-4 |
| Two 8-foot 800-MA R.S. | 24" | 96 1/2" | 86279-8 |

| | | | |
|-------------------------|-----|---------|---------|
| LUVEX®-2PG | | | |
| Two 4-foot Power Groove | 8" | 48 1/2" | 76278-4 |
| Two 8-foot Power Groove | 8" | 96 1/2" | 76278-8 |
| Two 4-foot Power Groove | 24" | 48 1/2" | 76279-4 |
| Two 8-foot Power Groove | 24" | 96 1/2" | 76279-8 |

VELVALUME

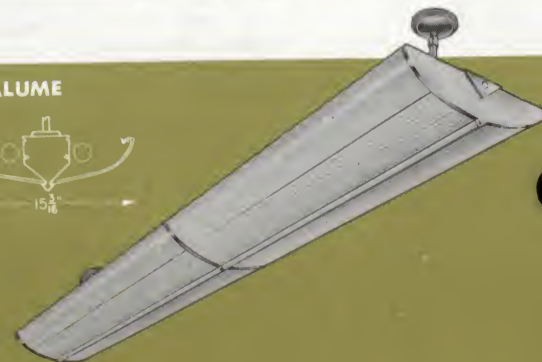

COMMERCIAL FLUORESCENT LIGHTING

SPECIAL PURPOSE



| For Lamps | Length | Cat. No. |
|---------------------|--------|----------|
| UTILITY UNIT | | |
| Baked White Finish | | |
| Two 2-foot T. S. | 25" | 1220W |
| Two 4-foot R. S. | 49" | 1240W |
| Stainless Steel | | |
| Two 2-foot T. S. | 25" | 1220S |
| Two 4-foot R. S. | 49" | 1240S |

CORRALUME® CORRALINE® CORRALOUVER®

Single row units with two different hinged plastic enclosures or hinged metal louvers. For corridors, pedestrian tunnels, or long narrow traffic areas. Louvered units ideal for bin and stack lighting. Separably hinged enclosures. All metal parts finished in Hot-Bonded Super-White Enamel. U. L. listed.

| For Lamps | Length | Cat. No. |
|----------------------------------|--------|----------|
| CORRALUME-PLASTIC | | |
| One 4-foot Rapid Start | 49" | 40140-4 |
| Two 4-foot Rapid Start (Tandem) | 98" | 40140-8 |
| CORRALINE-PLASTIC | | |
| One 4-foot Rapid-Start | 49" | 40150-4 |
| Two 4-foot Rapid-Start (Tandem) | 98" | 40150-8 |
| CORRALOUVER-METAL LOUVERS | | |
| One 4-foot Rapid Start | 49" | 40160-4 |
| Two 4-foot Rapid-Start (Tandem) | 98" | 40160-8 |

HOSPITAL BED LIGHTS

New, totally enclosed, wall-mounting units with choice of upward light, downward light, or both. Prismatic control of light with Cleartext® type plastic. Day-Brite exclusive Trigger Latches on hinged enclosure. Equipped with two parallel blade and ground pin receptacle, and two circuit pull switch.


| For Lamps | Length | Cat. No. |
|------------------------|--------|----------|
| Baked White Finish | | |
| Two 2-foot T. S. Lamps | 25" | 2220W |
| Two 4-foot R. S. Lamps | 49" | 2240W |
| Stainless Steel | | |
| Two 2-foot Lamps T. S. | 25" | 2220S |
| Two 4-foot Lamps R. S. | 49" | 2240S |

COVE UNITS FOR CONCEALED MOUNTING

| Description | Length | Cat. No. |
|-----------------------------------|--------|----------|
| One-Lamp, 2-foot T. S. Unit | 2'-0" | 1791-2 |
| One-Lamp, 4-foot T. S. Unit | 4'-0" | 1791-4 |
| One-Row Tandem, 4-foot R. S. Unit | 8'-0" | 1791-8 |
| Two-Lamp, 2-foot T. S. Unit | 2'-0" | 1792-2 |
| Two-Lamp, 4-foot R. S. Unit | 4'-0" | 1792-4 |
| Two-Row Tandem, 4-foot R. S. Unit | 8'-0" | 1792-8 |


UTILITY UNIT

Beautiful new Utility Units. Prismatic control of upward and downward light with Cleartext®-type plastic. Unit is totally enclosed for cleaner operation. Day-Brite exclusive Trigger Latches on hinged enclosure. Equipped with two parallel blade and ground pin receptacle.

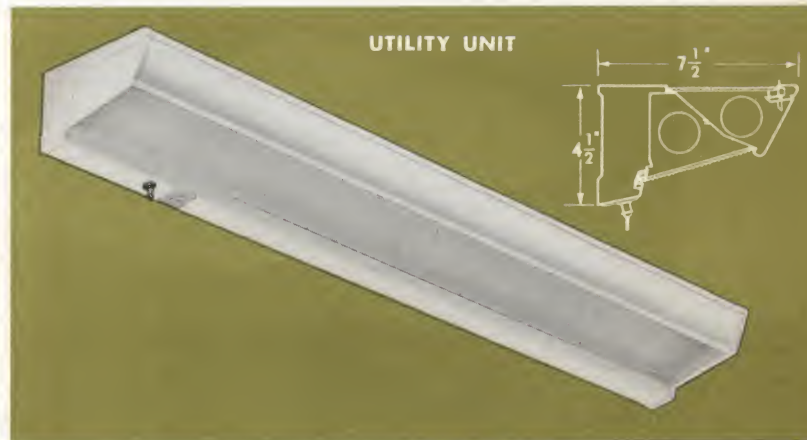

CORRALUME® CORRALOUVER® CORRALINE®

Patent No.
D-177,918

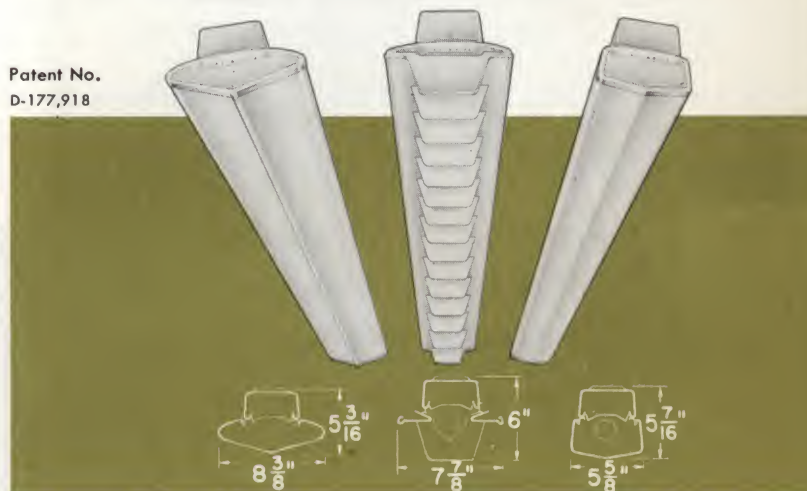

HOSPITAL BED LIGHT



COVE



DAY-BRITE LIGHTING, INC.

ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA




COMMERCIAL FLUORESCENT LIGHTING


SPECIAL PURPOSE LIGHT STRIP



ONE-ROW WITHOUT REFLECTORS

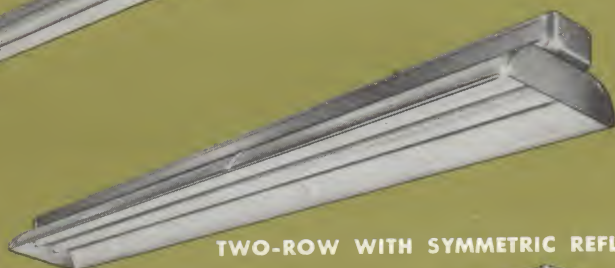


TWO-ROW WITH SYMMETRIC REFLECTOR

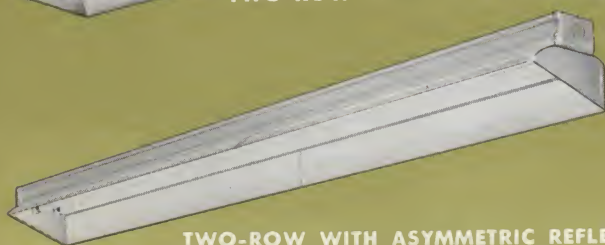


TWO-ROW WITH ASYMMETRIC REFLECTOR


ONE-ROW FLUORESCENT STRIP

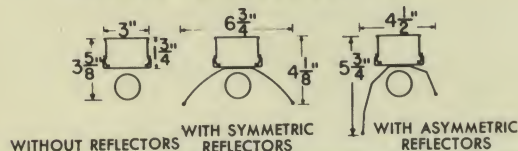


ONE-ROW SLIMLINE AND 800-MA STRIP

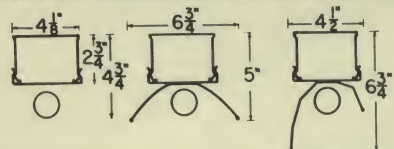

TWO-ROW FLUORESCENT STRIP

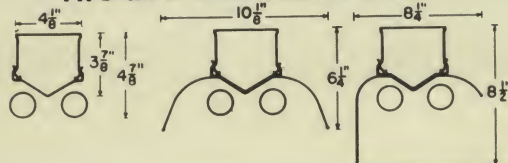

ONE AND TWO-LAMP POWER-GROOVE UNITS



| No. | For Lamps | Length | Cat. No. |
|-------------------------------------|-----------------------------|------------|-----------|
| ONE-LAMP, WITHOUT REFLECTORS | | | |
| 1 | 4-foot Rapid Start | 4'-1 1/4" | R-89140-4 |
| 2 | 4-foot Rapid-Start (Tandem) | 8'-1 1/4" | R-89140-8 |
| 1 | 8-foot Slimline | 8'-1 1/4" | 99140-8 |
| 2 | 8-foot Slimline (Tandem) | 16'-1 1/4" | 99140-16 |

| | | | |
|-------------------------------------|--------------------|-----------|---------|
| TWO-LAMP, WITHOUT REFLECTORS | | | |
| 2 | 4-foot Rapid-Start | 4'-1 1/4" | 49240-4 |
| 2 | 8-foot Slimline | 8'-1 1/4" | 99240-8 |

| | | | |
|--------------------------------------------------------------|-----------------------------|------------|-----------|
| ONE-LAMP WITH ASYMMETRIC SPECULAR ALUMINUM REFLECTORS | | | |
| 1 | 4-foot Rapid-Start | 4'-1 1/4" | R-89150-4 |
| 2 | 4-foot Rapid-Start (Tandem) | 8'-1 1/4" | R-89150-8 |
| 1 | 8-foot Slimline | 8'-1 1/4" | 99150-8 |
| 2 | 8-foot Slimline (Tandem) | 16'-1 1/4" | 99150-16 |

| | | | |
|--------------------------------------------------------------|--------------------|-----------|---------|
| TWO-LAMP WITH ASYMMETRIC SPECULAR ALUMINUM REFLECTORS | | | |
| 2 | 4-foot Rapid-Start | 4'-1 1/4" | 49250-4 |
| 2 | 8-foot Slimline | 8'-1 1/4" | 99250-8 |

| | | | |
|-------------------------------------------------------------|-----------------------------|------------|-----------|
| ONE-LAMP WITH SYMMETRIC SPECULAR ALUMINUM REFLECTORS | | | |
| 1 | 4-foot Rapid Start | 4'-1 1/4" | R-89155-4 |
| 2 | 4-foot Rapid Start (Tandem) | 8'-1 1/4" | R-89155-8 |
| 1 | 8-foot Slimline | 8'-1 1/4" | 99155-8 |
| 2 | 8-foot Slimline (Tandem) | 16'-1 1/4" | 99155-16 |

| | | | |
|-------------------------------------------------------------|--------------------|-----------|---------|
| TWO-LAMP WITH SYMMETRIC SPECULAR ALUMINUM REFLECTORS | | | |
| 2 | 4-foot Rapid Start | 4'-1 1/4" | 49255-4 |
| 2 | 8-foot Slimline | 8'-1 1/4" | 99255-8 |

| | | | |
|------------------------------------------------------------|-----------------------------|------------|-----------|
| ONE-LAMP WITH ASYMMETRIC PORCELAIN ENAMEL REFLECTOR | | | |
| 1 | 4-foot Rapid-Start | 4'-1 1/4" | R-89160-4 |
| 2 | 4-foot Rapid-Start (Tandem) | 8'-1 1/4" | R-89160-8 |
| 1 | 8-foot Slimline | 8'-1 1/4" | 99160-8 |
| 2 | 8-foot Slimline (Tandem) | 16'-1 1/4" | 99160-16 |

| | | | |
|-------------------------------------------------------------|--------------------|-----------|---------|
| TWO-LAMP WITH ASYMMETRIC PORCELAIN ENAMEL REFLECTORS | | | |
| 2 | 4-foot Rapid-Start | 4'-1 1/4" | 49260-4 |
| 2 | 8-foot Slimline | 8'-1 1/4" | 99260-8 |

| | | | |
|------------------------------------------------------------|-----------------------------|------------|-----------|
| ONE-LAMP WITH SYMMETRIC PORCELAIN ENAMEL REFLECTORS | | | |
| 1 | 4-foot Rapid-Start | 4'-1 1/4" | R-89165-4 |
| 2 | 4-foot Rapid-Start (Tandem) | 8'-1 1/4" | R-89165-8 |
| 1 | 8-foot Slimline | 8'-1 1/4" | 99165-8 |
| 2 | 8-foot Slimline (Tandem) | 16'-1 1/4" | 99165-16 |

| | | | |
|------------------------------------------------------------|--------------------|-----------|---------|
| TWO-LAMP WITH SYMMETRIC PORCELAIN ENAMEL REFLECTORS | | | |
| 2 | 4-foot Rapid-Start | 4'-1 1/4" | 49265-4 |
| 2 | 8-foot Slimline | 8'-1 1/4" | 99265-8 |

| Description | Length | Cat. No. |
|-------------------------------------------|------------|----------|
| ONE-LAMP 800-MA, RAPID-START UNITS | | |
| One-Lamp 4-foot Unit with Ends | 4'-1 1/4" | 79140-4 |
| One-Lamp 8-foot Unit with Ends | 8'-1 1/4" | 79140-8 |
| Two-Lamp Tandem 16-foot Unit with Ends | 16'-1 1/4" | 79140-16 |

| | | |
|-------------------------------------------|-----------|---------|
| TWO-LAMP 800-MA, RAPID-START UNITS | | |
| Two-Lamp, 4-foot Unit with Ends | 4'-1 1/4" | 79240-4 |
| Two-Lamp, 8-foot Unit with Ends | 8'-1 1/4" | 79240-8 |

| | | |
|----------------------------------------------|------------|----------|
| ONE-LAMP POWER-GROOVE, VHO, SHO UNITS | | |
| One-Lamp 4-foot Unit with Ends | 4'-1 1/4" | 79180-4 |
| One-Lamp 8-foot Unit with Ends | 8'-1 1/4" | 79180-8 |
| Two-Lamp Tandem 16-foot Unit with Ends | 16'-1 1/4" | 79182-16 |


| | | |
|---------------------------------------------------|---------|---------|
| TWO-LAMP POWER-GROOVE, VHO & SHO UNITS | | |
| Two-Lamp, 4-foot Unit with Ends | 4'-1/2" | 79280-4 |
| Two-Lamp, 8-foot Unit with Ends | 8'-0" | 79280-8 |

DAY-BRITE LIGHTING, INC.

ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA



COMMERCIAL FLUORESCENT LIGHTING HANGERS

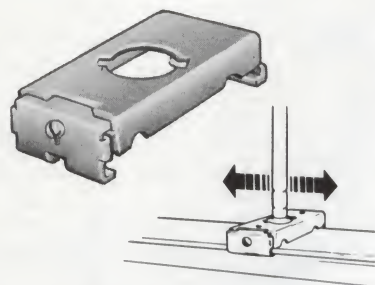

SLIDING CLAMP

Ideal for remodeling work . . . allow positioning of hangers at any location along length of channel to miss obstructions and permit attachment to joists or other overhead supports. Can be used with LUVEX, Ranger Fixtures.

| Catalog No. | Description | No. Per Carton | Std. Pkg. |
|---------------|----------------------------------|----------------|-----------|
| 3318-A | 8-in. "A-J" Single Stem Hangers | 2 | 20 |
| 3314-A | 24-in. "A-J" Single Stem Hangers | 2 | 20 |
| 3328-A | 8-in. Twin-Stem Hanger | 1 | 10 |
| 3324-A | 24-in. Twin-Stem Hanger | 1 | 10 |
| 3351 | 1½-in. Spacer Hanger | 10 | 10 |
| 3352 | 1½-in. Spacer Hanger | 5 | 5 |
| 3425-A | Sliding Clamp | 10 | 10 |

A-J[®] ADJUSTABLE HANGERS


Use with 8-foot fixtures and for continuous installations. Provides over one inch vertical adjustment. Finished in baked lustre aluminum enamel. Standard lengths 8-inch and 24-inch. Other lengths available.




Patent No. 2446736

SPACER HANGERS

Complies with National Electrical Code requirement (Article 410, Paragraph 4184). Positions fixture 1½ inches from ceilings of combustible material. **No. 3351** . . . for use with PARAWING, CORRAs, HOLIDAY, PLEXOLINE-2, RANGER, 4800 LIGHT STRIP, and 48-inch wide DAYLUME. **No. 3352** . . . Can be used with 12-inch and 24-inch wide DAYLUME, and PLEXOLINE-4.




No. 3351

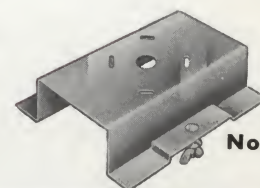

No. 3352

TWIN-STEM HANGERS


Used with 4-foot single units. Finished in baked lustre aluminum enamel. Standard lengths 8-inch and 24-inch. Other lengths available.

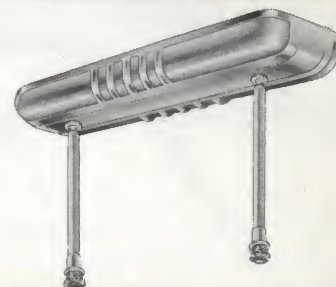

HANGING DEVICES FOR USE ON SUSPENDED CEILINGS


FOR EXPOSED GRID CEILINGS

Surface Mounting

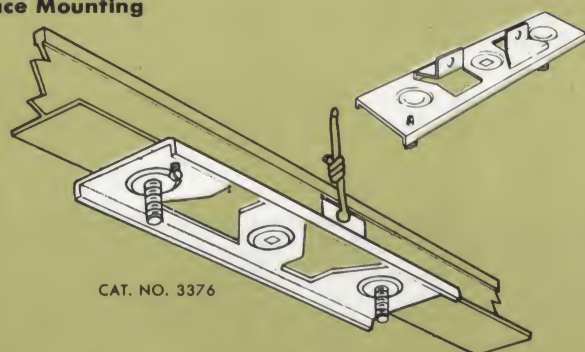

CAT. NO. 3376

Suspension Mounting.

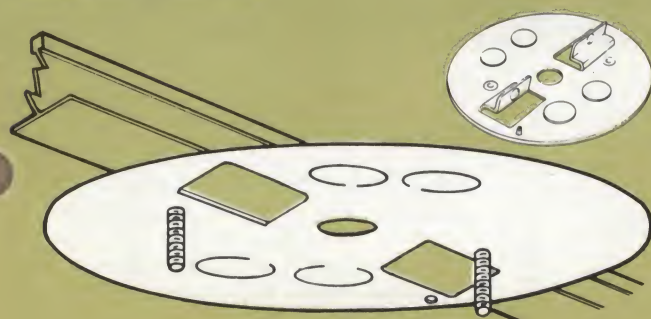


CAT. NO. 3377

FOR ACCESS TILE CEILING

Surface Mounting

CAT. NO. 3376




CAT. NO. 3376



CAT. NO. 3379

Suspension Mounting

CAT. NO. 3376



CAT. NO. 3379

FOR CONCEALED SPLINE CEILINGS

Surface Mounting

CAT. NO. 3378




CAT. NO. 3378



CAT. NO. 3379

Suspension Mounting

CAT. NO. 3378




CAT. NO. 3379



**COMMERCIAL FLUORESCENT
LIGHTING
RECESSED**

**COMFORT CONDITIONING
WITH LIGHT AND AIR**

... the result of the combined research and engineering know-how of Day-Brite Lighting, Inc., and the Barber-Colman Company. Trim, functional design is combined with the finest in comfort lighting and air distribution. Units can be used individually or in combination with lighting fixtures equipped with matching enclosing elements and are compatible with all ceiling systems.

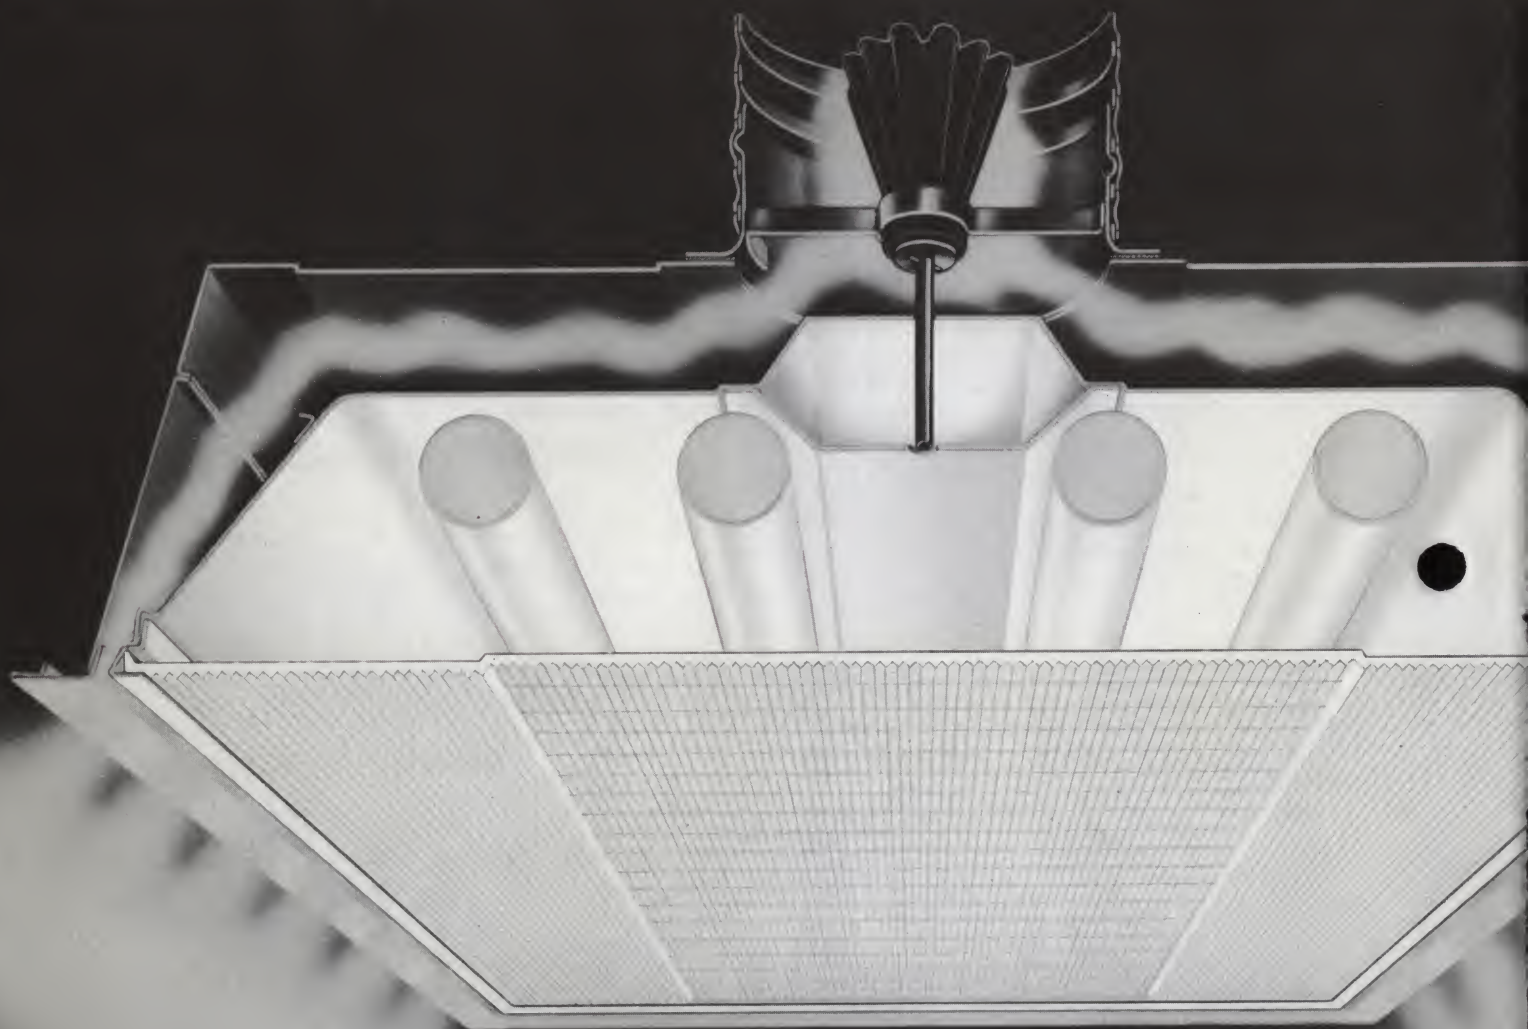

PATENTED* DOUBLE WALL CONSTRUCTION

Air passes through separate chamber completely isolated from fluorescent lamps. Stabilized light output ... Unequalled in-service performance ... No reduction in luminous area.


Besides Cleartex®, Day-Brite Air Diffusing Units are available with all other enclosing elements used on standard Troffers and Mobilex as shown on pages 14, 15, 16 and 17.

*Patent No. 2564334, other patents pending.

AIR DIFFUSING SHALLOW TROFFERS AND MOBILEX®

12" WIDE TROFFER
CLEARTEX24" WIDE MOBILEX
CLEARTEX

12" Wide

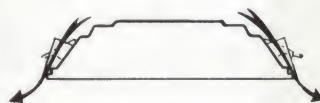

24" Wide

Catalog No.

| | | | | |
|-----------------------------------------------|-------|--------------|--------------|--------------|
| For Lamps | | Length | 2-Lamp | 3-Lamp |
| AIR DIFFUSING SHALLOW TROFFERS WITH CLEARTEX® | | | | |
| Flange Type | | | | |
| 4-foot Rapid-Start | | 48" | A4F21-A740-4 | A4F31-A740-4 |
| Grid Type | | | | |
| 4-foot Rapid-Start | | 48" | A4G21-A640-4 | A4G31-A640-4 |
| For Lamps | Lgth. | 2-Lamp | 3-Lamp | 4-Lamp |
| AIR DIFFUSING SHALLOW MOBILEX® WITH CLEARTEX® | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | A4F22-A790-4 | A4F32-A790-4 | A4F42-A790-4 |
| Grid Type | | | | |
| 4-ft. R.S. | 48" | A4G22-A690-4 | A4G32-A690-4 | A4G42-A690-4 |

AIR DIFFUSING TROFFERS AND MOBILEX® WITH PARALOUVERS®

Patented Day-Brite Paralouvers, combined with parabolic Alzak body and center "V", reduce brightness in the "glare zone". Perforations throughout the entire length of Center "V" louver diffuse conditioned air gently and evenly.





12" Wide



24" Wide

| For Lamps | Length | Finish | Cat. No. |
|---------------------------------------------------------------|--------|--------|----------|
| AIR DIFFUSING 12" WIDE PARAFLO WITH ALZAK PARALOUVERS® | | | |
| Flange Type | | | |
| 4-foot Rapid-Start | 48" | Alzak | 4F202-4 |
| 4-foot Rapid-Start | 48" | White | 4F212-4 |
| Grid Type | | | |
| 4-foot Rapid-Start | 48" | Alzak | 4G202-4 |
| 4-foot Rapid-Start | 48" | White | 4G212-4 |
| AIR DIFFUSING 24" WIDE PARAFLO WITH ALZAK PARALOUVERS® | | | |
| Flange Type | | | |
| 4-foot Rapid-Start | 48" | Alzak | 4F452-4 |
| 4-foot Rapid-Start | 48" | White | 4F462-4 |
| Grid Type | | | |
| 4-foot Rapid-Start | 48" | Alzak | 4G452-4 |
| 4-foot Rapid-Start | 48" | White | 4G462-4 |

PARALOUVER PATENT NOS. 26833799 AND 507541

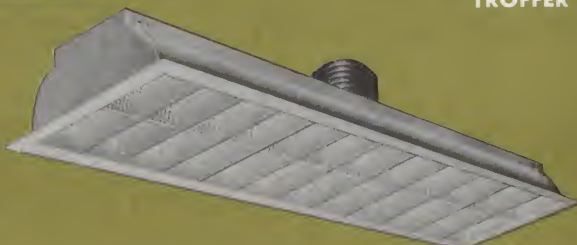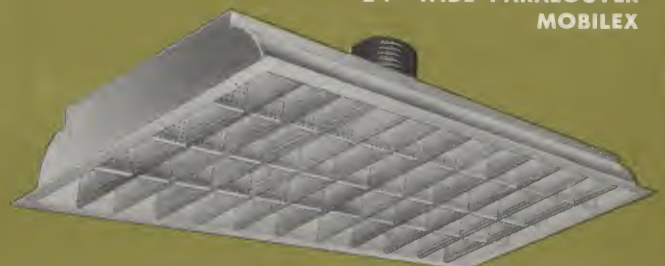
12" WIDE PARALOUVER
TROFFER24" WIDE PARALOUVER
MOBILEX

Listings above apply to Ceiling Systems F and G. Troffers and MobileX are also furnished for other Ceiling Systems shown on page 18.




COMMERCIAL FLUORESCENT LIGHTING RECESSED


12" WIDE TROFFER

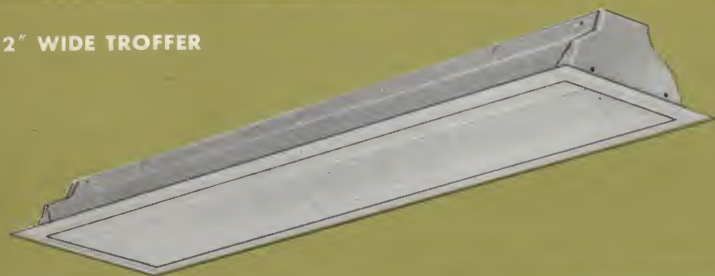

24" WIDE MOBILEX

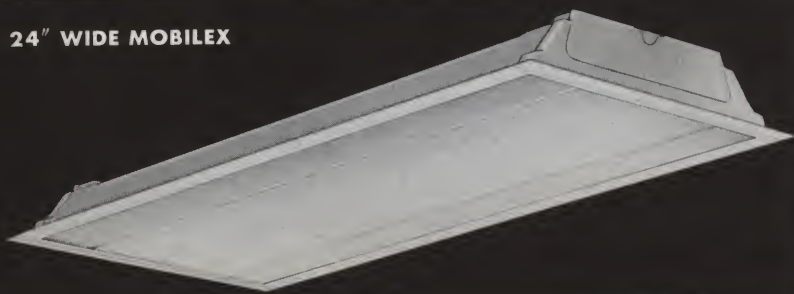

48" WIDE MOBILEX

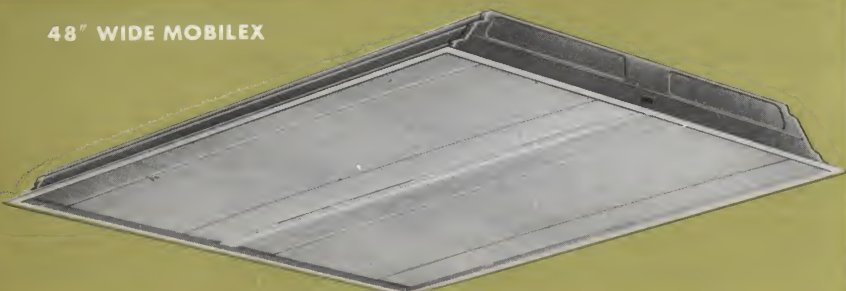

SHALLOW TROFFERS AND MOBILEX®

Ideal for stores, offices and institutions. Exclusive Day-Brite recessed fixtures in Hot-Bonded Super-White enamel finish, rust-inhibited. Hinged frames allow hinging from either side or complete removal. Certified CBM ballasts, individually wired, provided with safety fuse and U/L Listed. See installation details of fixtures in various ceiling systems, page 18.

CLEARTEX®

Day-Brite's exclusive extruded plastic enclosing element. Center recessed section has combination of longitudinal prisms and lateral striations for maximum brightness control and distinctive appearance. Outer sections of panel have 14 precise and optically correct longitudinal prisms.

LUMATEX®

Identical to Day-Brite Cleartex, but with translucent milk-white color.

| | | Catalog No. | |
|----------------------------------|--------|-------------|------------|
| For Lamps | Length | 2-Lamp | 3-Lamp |
| 12" WIDE CLEARTEX TROFFER | | | |
| Flange Type | | | |
| 4-foot R.S. | 48" | 4F21-740-4 | 4F31-740-4 |
| 4-foot (Tandem) R.S. | 96" | 4F21-740-8 | 4F31-740-8 |

| | | | |
|-------------|-----|------------|------------|
| Grid Type | | | |
| 4-foot R.S. | 48" | 4G21-640-4 | 4G31-640-4 |

| | | | |
|---------------------------------|-----|------------|------------|
| 12" WIDE LUMATEX TROFFER | | | |
| Flange Type | | | |
| 4-foot R.S. | 48" | 4F21-741-4 | 4F31-741-4 |
| 4-foot (Tandem) R.S. | 96" | 4F21-741-8 | 4F31-741-8 |

| | | | |
|-------------|-----|------------|------------|
| Grid Type | | | |
| 4-foot R.S. | 48" | 4G21-641-4 | 4G31-641-4 |

| | | | Catalog No. | |
|----------------------------------|--------|------------|-------------|------------|
| For Lamps | Length | 2-Lamp | 3-Lamp | 4-Lamp |
| 24" WIDE CLEARTEX MOBILEX | | | | |
| Flange Type | | | | |
| 2-ft. T.S. | 24" | 2F22-390-2 | 2F32-390-2 | 2F42-390-2 |
| 4-ft. R.S. | 48" | 4F22-790-4 | 4F32-790-4 | 4F42-790-4 |

| | | | | |
|------------|-----|------------|------------|------------|
| Grid Type | | | | |
| 2-ft. T.S. | 24" | 2G22-290-2 | 2G32-290-2 | 2G42-290-2 |
| 4-ft. R.S. | 48" | 4G22-690-4 | 4G32-690-4 | 4G42-690-4 |

| | | | | |
|---------------------------------|-----|------------|------------|------------|
| 24" WIDE LUMATEX MOBILEX | | | | |
| Flange Type | | | | |
| 2-ft. T.S. | 24" | 2F22-391-2 | 2F32-391-2 | 2F42-391-2 |
| 4-ft. R.S. | 48" | 2F22-791-4 | 2F32-791-4 | 2F42-791-4 |

| | | | | |
|------------|-----|------------|------------|------------|
| Grid Type | | | | |
| 2-ft. T.S. | 24" | 2G22-291-2 | 2G32-291-2 | 2G42-291-2 |
| 4-ft. R.S. | 48" | 4G22-691-4 | 4G32-691-4 | 4G42-691-4 |

| Catalog No. | | | | |
|----------------------------------|--------|----------|----------|----------|
| For Lamps | Length | 4-Lamp | 6-Lamp | 8-Lamp |
| 48" WIDE CLEARTEX MOBILEX | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | 4F44-590 | 4F64-590 | 4F84-590 |

| | | | | |
|------------|-----|----------|----------|----------|
| Grid Type | | | | |
| 4-ft. R.S. | 48" | 4G44-590 | 4G64-590 | 4G84-590 |

| | | | | |
|---------------------------------|-----|----------|----------|----------|
| 48" WIDE LUMATEX MOBILEX | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | 4F44-591 | 4F64-591 | 4F84-591 |

| | | | | |
|------------|-----|----------|----------|----------|
| Grid Type | | | | |
| 4-ft. R.S. | 48" | 4G44-591 | 4G64-591 | 4G84-591 |

Listings above apply to Ceiling Systems F and G. Troffers and Mobilex are also furnished for other Ceiling Systems shown on page 18.



COMMERCIAL FLUORESCENT LIGHTING RECESSED

CRESTEX®

Molded plastic panels in diffused matte finish. Ultra modern in appearance—ideal for simple contemporary interiors.



| For Lamps | Length | 2-Lamp | 3-Lamp | |
|---------------------------------|--------|------------|------------|----------|
| 12" WIDE CRESTEX TROFFER | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | 4F21-743-4 | 4F31-743-4 | |
| 4-ft. (Tandem) R.S. | 96" | 4F21-743-8 | 4F31-743-8 | |
| Grid Type | | | | |
| 4-ft. R.S. | 48" | 4G21-643-4 | 4G31-643-4 | |
| 4-ft. (Tandem) R.S. | 96" | 4G21-643-8 | 4G31-643-8 | |
| For Lamps | Length | 2-Lamp | 3-Lamp | 4-Lamp |
| 24" WIDE CRESTEX MOBILEX | | | | |
| Flange Type | | | | |
| 2-ft. T.S. | 24" | 2F22-393 | 2F32-393 | 2F42-393 |
| 4-ft. R.S. | 48" | 4F22-793 | 4F32-793 | 4F42-793 |
| Grid Type | | | | |
| 2-ft. T.S. | 24" | 2G22-293 | 2G32-293 | 2G42-293 |
| 4-ft. R.S. | 48" | 4G22-693 | 4G32-693 | 4G42-693 |
| 48" WIDE CRESTEX MOBILEX | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | 4F44-593 | 4F64-593 | 4F84-593 |
| Grid Type | | | | |
| 4-ft. R.S. | 48" | 4G44-593 | 4G64-593 | 4G84-593 |

Listings above apply to Ceiling Systems F and G. Troffers and Mobilex are also furnished for other Ceiling Systems shown on page 18.

SHALLOW TROFFERS AND MOBILEX®

For surface companion units, see pages 4 and 5.

12" WIDE TROFFER



24" WIDE MOBILEX



48" WIDE MOBILEX




DAY-BRITE LIGHTING, INC.
ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA

DAY-BRITE

**COMMERCIAL FLUORESCENT
LIGHTING
RECESSED**

48" WIDE MOBILEX

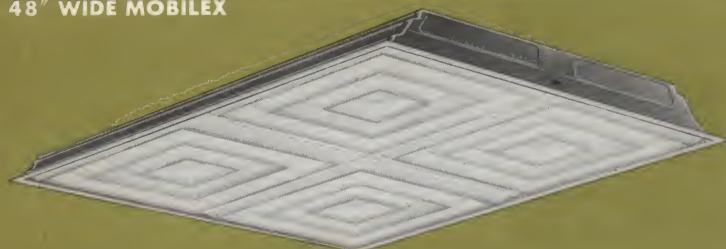

24" WIDE MOBILEX




DAYTEX®

Molded translucent 2'x2' panels featuring enclosed square design.

48" WIDE MOBILEX



24" WIDE MOBILEX

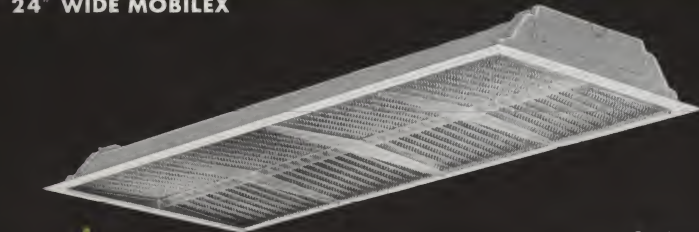


6024-DB CONTROLENS*

Molded acrylic plastic lenses which are ribbed and slightly recessed toward center.

* © Holophane Co., Inc.

12" WIDE TROFFER

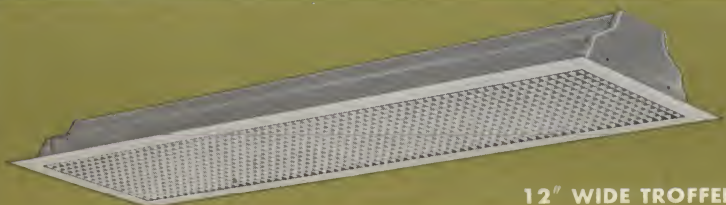

**SHALLOW TROFFERS
AND MOBILEX®**



Catalog No.

For Lamps Lgth. 2-Lamp 3-Lamp 4-Lamp

24" WIDE DAYTEX MOBILEX

Flange Type

| | | | | |
|------------|-----|----------|----------|----------|
| 2-ft. T.S. | 24" | 2F22-399 | 2F32-399 | 2F42-399 |
| 4-ft. R.S. | 48" | 4F22-799 | 4F32-799 | 4F42-799 |

Grid Type

| | | | | |
|------------|-----|----------|----------|----------|
| 2-ft. T.S. | 24" | 2G22-299 | 2G32-299 | 2G42-299 |
| 4-ft. R.S. | 48" | 4G22-699 | 4G32-699 | 4G42-699 |

48" WIDE DAYTEX MOBILEX

Flange Type

| | | | | |
|------------|-----|----------|----------|----------|
| 4-ft. R.S. | 48" | 4F44-599 | 4F64-599 | 4F84-599 |
|------------|-----|----------|----------|----------|

Grid Type

| | | | | |
|------------|-----|----------|----------|----------|
| 4-ft. R.S. | 48" | 4G44-599 | 4G64-599 | 4G84-599 |
|------------|-----|----------|----------|----------|

24" WIDE 6024-DB CONTROLENS MOBILEX

Flange Type

| | | | | |
|------------|-----|-------------|-------------|-------------|
| 2-ft. T.S. | 24" | H2F22-381-2 | H2F32-381-2 | H2F42-381-2 |
| 4-ft. R.S. | 48" | H4F22-781-4 | H4F32-781-4 | H4F42-781-4 |

Grid Type

| | | | | |
|------------|-----|-------------|-------------|-------------|
| 2-ft. T.S. | 24" | H2G22-281-2 | H2G32-281-2 | H2G42-281-2 |
| 4-ft. R.S. | 48" | H4G22-681-4 | H4G32-681-4 | H4G42-681-4 |

48" WIDE 6024-DB CONTROLENS MOBILEX

Flange Type

| | | | | |
|------------|-----|----------|----------|----------|
| 4-ft. R.S. | 48" | 4F44-581 | 4F64-581 | 4F84-581 |
|------------|-----|----------|----------|----------|

Grid Type

| | | | | |
|------------|-----|----------|----------|----------|
| 4-ft. R.S. | 48" | 4G44-581 | 4G64-581 | 4G84-581 |
|------------|-----|----------|----------|----------|

24" WIDE PLASTIC EGG CRATE MOBILEX

Flange Type

| | | | | |
|------------|-----|------------|------------|------------|
| 2-ft. T.S. | 24" | 2F22-394-2 | 2F32-394-2 | 2F42-394-2 |
| 4-ft. R.S. | 48" | 4F22-794-4 | 4F32-794-4 | 4F42-794-4 |

Grid Type

| | | | | |
|------------|-----|------------|------------|------------|
| 2-ft. T.S. | 24" | 2G22-294-2 | 2G32-294-2 | 2G42-294-2 |
| 4-ft. R.S. | 48" | 4G22-694-4 | 4G32-694-4 | 4G42-694-4 |

| | | | |
|-----------|--------|--------|--------|
| For Lamps | Length | 2-Lamp | 3-Lamp |
|-----------|--------|--------|--------|

12" WIDE PLASTIC EGG CRATE TROFFER

Flange Type

| | | | |
|------------|-----|------------|------------|
| 4-ft. R.S. | 48" | 4F21-744-4 | 4F31-744-4 |
| 4-ft. R.S. | 96" | 4F21-744-8 | 4F31-744-8 |


Grid Type

| | | | |
|------------|-----|------------|------------|
| 4-ft. R.S. | 48" | 4G21-644-4 | 4G31-644-4 |
|------------|-----|------------|------------|

Listings above apply to Ceiling Systems F and G. Troffers and Mobilex are also furnished for other Ceiling Systems shown on page 18.

PLASTIC EGG-CRATE LOUVERS

$\frac{5}{8}$ " cells, $\frac{5}{8}$ " deep. Designed to provide 45° x 45° shielding.

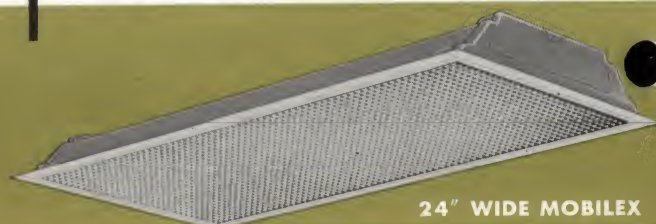


24" WIDE MOBILEX



COMMERCIAL FLUORESCENT LIGHTING RECESSED

12" WIDE TROFFER

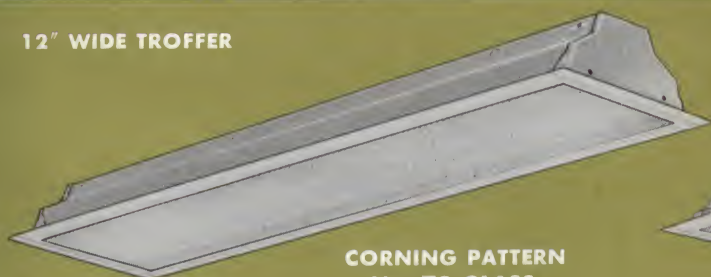

CORNING PATTERN
No. 70 GLASS



24" WIDE MOBILEX

| Catalog No. | | | | |
|------------------------------------------------------|--------|------------|------------|--|
| For Lamps | Length | 2-Lamp | 3-Lamp | |
| 12" WIDE CORNING PATTERN No. 70 GLASS TROFFER | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | 4F21-721-4 | 4F31-721-4 | |
| 4-ft. (Tandem) R.S. | 96" | 4F21-721-8 | 4F31-721-8 | |
| Grid Type | | | | |
| 4-ft. R.S. | 48" | 4G21-621-4 | 4G31-621-4 | |

| Catalog No. | | | | |
|------------------------------------------------------|--------|------------|------------|------------|
| For Lamps | Length | 2-Lamp | 3-Lamp | 4-Lamp |
| 24" WIDE CORNING PATTERN No. 70 GLASS MOBILEX | | | | |
| Flange Type | | | | |
| 2-ft. T.S. | 24" | 2F22-371-2 | 2F32-371-2 | 2F42-371-2 |
| 4-ft. R.S. | 48" | 4F22-771-4 | 4F32-771-4 | 4F42-771-4 |
| Grid Type | | | | |
| 2-ft. T.S. | 24" | 2G22-271-2 | 2G32-271-2 | 2G42-271-2 |
| 4-ft. R.S. | 48" | 4G22-671-4 | 4G32-671-4 | 4G42-671-4 |

| Catalog No. | | | | |
|--------------------------------------------------|--------|-------------|-------------|--|
| For Lamps | Length | 2-Lamp | 3-Lamp | |
| 12" WIDE TROFFER WITH 6011-DB CONTROLENS* | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | H4F21-731-4 | H4F31-731-4 | |
| 4-ft. (Tandem) R.S. | 96" | H4F21-731-8 | H4F31-731-8 | |
| Grid Type | | | | |
| 4-ft. R.S. | 48" | H4G21-631-4 | H4G31-631-4 | |

| | | | | |
|----------------------------------------------|-----|------------|------------|--|
| 12" WIDE 9015-DB CONTROLENS* TROFFERS | | | | |
| Flange Type | | | | |
| 4-ft. R.S. | 48" | 4F21-730-4 | 4F31-730-4 | |
| 4-ft. (Tandem) R.S. | 96" | 4F21-730-8 | 4F31-730-8 | |
| Grid Type | | | | |
| 4-ft. R.S. | 48" | 4G21-630-4 | 4G31-630-4 | |

| For Lamps | Length | Finish | Cat. No. |
|----------------------------------------------------|--------|--------|----------|
| 12" WIDE TROFFERS WITH ALUMINUM PARALOUVERS | | | |
| Flange Type | | | |
| 4-ft. R.S. | 48" | Alzak | 4F201-4 |
| 4-ft. (Tandem) R.S. | 96" | Alzak | 4F201-8 |
| 4-ft. R.S. | 48" | White | 4F211-4 |
| 4-ft. (Tandem) R.S. | 96" | White | 4F211-8 |
| Grid Type | | | |
| 4-ft. R.S. | 48" | Alzak | 4G201-4 |
| 4-ft. R.S. | 48" | White | 4G211-4 |

| | | | |
|---------------------------------------------------|-----|-------|---------|
| 24" WIDE MOBILEX WITH ALUMINUM PARALOUVERS | | | |
| Flange Type | | | |
| 2-ft. T.S. | 24" | Alzak | 2F451-2 |
| 4-ft. R.S. | 48" | Alzak | 4F451-4 |
| 2-ft. T.S. | 24" | White | 2F461-2 |
| 4-ft. R.S. | 48" | White | 4F461-4 |
| Grid Type | | | |
| 2-ft. T.S. | 24" | Alzak | 2G451-2 |
| 4-ft. R.S. | 48" | Alzak | 4G451-4 |
| 2-ft. T.S. | 24" | White | 2G461-2 |
| 4-ft. R.S. | 48" | White | 4G461-4 |

Listings above apply to Ceiling Systems F and G. Troffers and Mobilex are also furnished for other Ceiling Systems shown on page 18.


PAGE 17

SHALLOW TROFFERS AND MOBILEX®


22
DA

Ideal for stores, offices and institutions. Exclusive Day-Brite recessed fixtures in Hot-Bonded Super-White enamel finish, rust-inhibited. Hinged frames allow hinging from either side or complete removal. Certified CBM ballasts, individually wired, provided with safety fuse and U/L Listed. See installation details of fixtures in various ceiling systems, page 18.

6011-DB CONTROLENS*
TROFFER

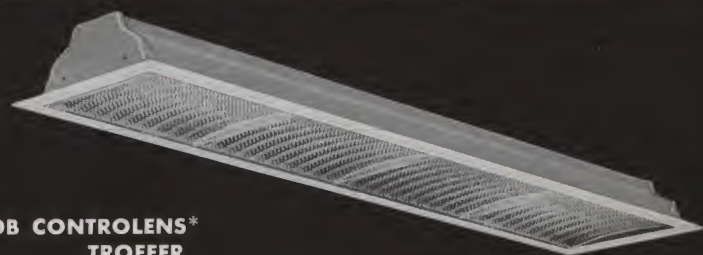


9015-DB CONTROLENS*
TROFFER

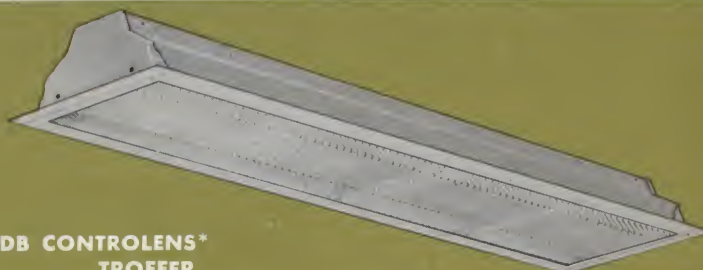

12" WIDE TROFFER



24" WIDE MOBILEX

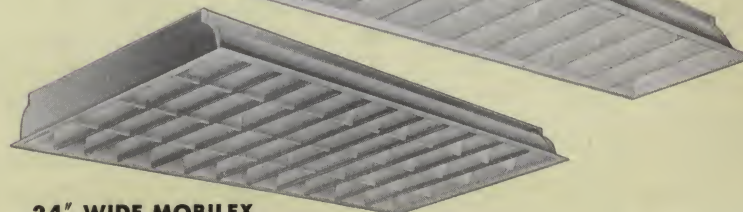

PARALOUVER® TROFFERS AND MOBILEX

Comfortable illumination from any normal viewing angle. Parabolic reflecting surfaces reflect light downward in controlled area.

* ©Holophane Co., Inc.

DAY-BRITE LIGHTING, INC.
ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA



COMMERCIAL FLUORESCENT LIGHTING CEILING SYSTEMS

All Day-Brite Troffers and Mobilex (including Comfort Conditioning Troffers and Mobilex) can be furnished for the Ceiling Systems below. Complete details are in the Standard Day-Brite Catalog. System "P" (Plaster Frames) is also available for use with System "F" Fixtures.

| | 12" WIDE SHALLOW TROFFER | 12" WIDE PARALOUVER TROFFER | 24" WIDE SHALLOW MOBILEX | 24" WIDE PARALOUVER MOBILEX |
|------------|-----------------------------|--------------------------------|-----------------------------|--------------------------------|
| SYSTEM 'F' | | | | |
| SYSTEM 'M' | | | | |
| SYSTEM 'R' | | | | |
| SYSTEM 'L' | | | | |
| SYSTEM 'G' | | | | |


48" WIDE MOBILEX

| SYSTEM 'F' | SYSTEM 'M' | SYSTEM 'G' |
|------------|------------|------------|
| | | |




COMMERCIAL INCANDESCENT LIGHTING RECESSED

UNI-FRAME WITH TEMPERED LENS

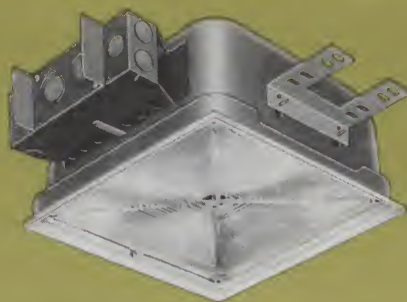


UNI-FRAME WITH DROPPED BOWL AND SPLAY

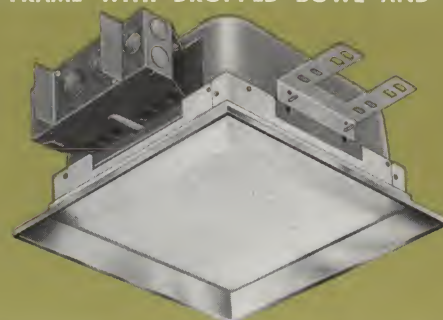

Patents Pending




100-150-Watt



100-150-Watt
With Matching Splay




200-300-Watt




200-300-Watt
With Matching Splay

ADJUSTABLE UNIT

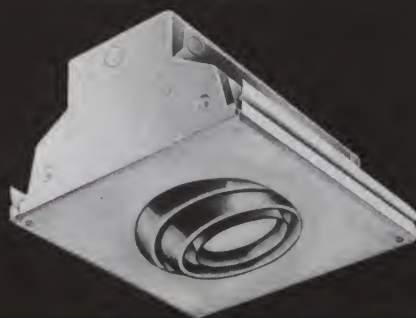

FIXED UNIT WITH CONTROLENS*

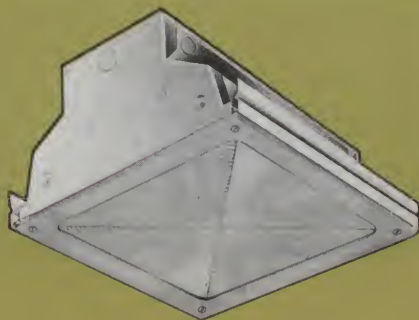

UNI-FRAME®

22

DA

Recessed incandescent units for Outdoor-indoor applications in stores, homes, office or school buildings. Two sizes, two enclosures, three frame finishes, (Baked White on steel, Anodized Aluminum-natural finish, Anodized Aluminum-brass finish. Optional splay also in all three finishes. Alzak aluminum reflector, Pyrex* lens and Pyrex glass bowl. Porcelain sockets. U/L listed.

*© Corning Glass Works

UNI-FRAME

100-150-Watt

Catalog No.

| | Catalog No. | With Matching Splay |
|----------------|-------------|---------------------|
| WHITE FRAME | | |
| Tempered Lens | W-150-G1 | W-150-G1-S1 |
| Glass Bowl | W-150-G3 | W-150-G3-S1 |
| ALUMINUM FRAME | | |
| Tempered Lens | A-150-G1 | A-150-G1-AS1 |
| Glass Bowl | A-150-G3 | A-150-G3-AS1 |
| BRASS FRAME | | |
| Tempered Lens | B-150-G1 | B-150-G1-BS1 |
| Glass Bowl | B-150-G3 | B-150-G3-BS1 |

200-300-Watt

| | | |
|----------------|----------|--------------|
| WHITE FRAME | | |
| Tempered Lens | W-300-G2 | W-300-G2-S2 |
| Glass Bowl | W-300-G4 | W-300-G4-S2 |
| ALUMINUM FRAME | | |
| Tempered Lens | A-300-G2 | A-300-G2-AS2 |
| Glass Bowl | A-300-G4 | A-300-G4-AS2 |
| BRASS FRAME | | |
| Tempered Lens | B-300-G2 | B-300-G2-BS2 |
| Glass Bowl | B-300-G4 | B-300-G4-BS2 |

ACCENT UNITS

Fixed and adjustable recessed incandescent units for use with ceiling systems "F" and "M". Accent Units can be used individually or in conjunction with standard Day-Brite troffers. Especially appropriate for merchandising areas.


Catalog Number

| Description | Individual Unit | Intermediate Section | End Section |
|----------------------------------------|-----------------|----------------------|-------------|
| Adjustable Unit for Ceiling System "F" | R-80137 | R-80137-CC | R-80137-CE |
| Fixed Unit for Ceiling System "F" | R-80127 | R-80127-CC | R-80127-CE |
| Adjustable Unit for Ceiling System "M" | R-80135 | R-80135-CC | R-80135-CE |
| Fixed Unit for Ceiling System "M" | R-80125 | R-80125-CC | R-80125-CE |

*© Holophane Co., Inc.



COMMERCIAL INCANDESCENT LIGHTING RECESSED





LOUVERED—Cat. No. R-80140
LOUVERED—Cat. No. 80143



Cat. No. 8039-W White
Cat. No. 8039-A Aluminum
Cat. No. 8039-B Brass Finish


12 3/4" square splays available for all Derby Downlights.
For square adjustable units see page 19.



DEEP BAFFLED—Cat. No. 80149

| Catalog No. | Lamp Types | Description |
|-------------|-------------------------------------|-----------------------|
| R-80140 | Par. 38, 150-watt or A-21, 100-watt | with removable louver |
| 80141 | A-21, 100-watt | with Controlens* |
| 80143 | R-40, 150 or 300-watt | with removable louver |
| 80149 | Par. 38 or R-40, 150-watt Spot | deep baffled unit |
| 80175 | Par. 38 or Par. 46 Side-prong | adjustable unit |

*@Holothane Co., Inc.

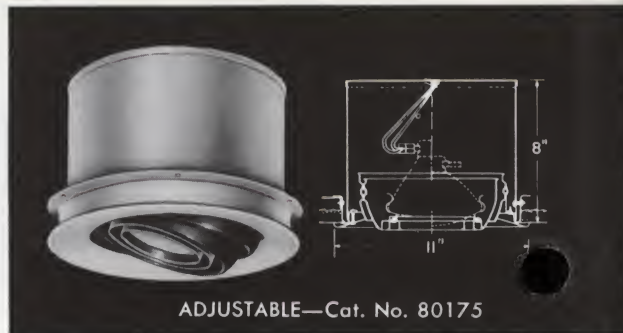

ADJUSTABLE—Cat. No. 80175

SPECIAL PURPOSE LIGHTING

RECESSED CANOPY UNITS

For outdoor applications and corridors, lavatories and entries.

Units have two porcelain sockets for 60-watt lamps. Frame is 2-piece, drop-hinge. Reflector is porcelain enamel. Enclosed with Albalite dish glass in Anodized or Baked Lustre aluminum Frames.

| Frame Finish | Catalog Number |
|--------------|----------------|
| Anodized | 2501 |
| Baked | 2503 |

RECESSED NITE LIGHTS

For corridors, bedrooms, steps, patios. Recessing box of seamless steel. Separably hinged inner frame accommodates one 25-watt, A-19 lamp.

| Frame and Face Finish | Catalog No. |
|-----------------------|-------------|
| Stainless Steel | 5086 |
| Baked Aluminum | 5085-A |





Hospital Bed Unit shown in sketch is listed on page 9.

CANOPY UNIT



NITE LIGHT





INDUSTRIAL FLUORESCENT LIGHTING



CFI®-30

For 4-foot and 8-foot Power-Groove and other extra high output lamps. 30% upward lighting. One-piece, "Vee-louvered" porcelain enamel reflectors with embossed apertures and ribs. Truss-type channel baked gray enamel finish.

| Length | Catalog No. |
|---------|-------------|
| 48 1/4" | R-71252-4 |
| 96 1/4" | R-71252-8 |

BAKED WHITE HINGED LOUVERS FOR CFI-30

| | |
|-----------------------------|--------|
| 4-foot | 7957-4 |
| 8-foot (2- 4-foot sections) | 7957-8 |

CFI®-15

| Description | Length | Cat. No. |
|---------------------------------|---------|----------|
| Complete Unit | 48 1/4" | 70211-4 |
| Section with coupling less ends | 96" | 70211-CO |
| Fixture Ends (Pair) | | 7921-P |

BAKED WHITE HINGED LOUVERS FOR CFI-15

| | |
|------------------------------|--------|
| 4-foot | 7917-4 |
| 8-foot (two 4-foot sections) | 7917-8 |


Pat. Nos. D-175431, D-175433, D-176367, D-177532, 2317434

CFI®


22
DA

The CFI (Comfort for Industry) series, distinctive in appearance, is a complete line of industrial fixtures. Slotted, embossed apertures are provided in the tops of the reflectors. Harsh ceiling contrasts are washed out—"hot spots" of light eliminated—visual strain largely avoided. Reflectors are lifetime porcelain enamel and have ribs which give added strength and beauty. All CFI Fixtures U. L. Listed.

CFI®-30

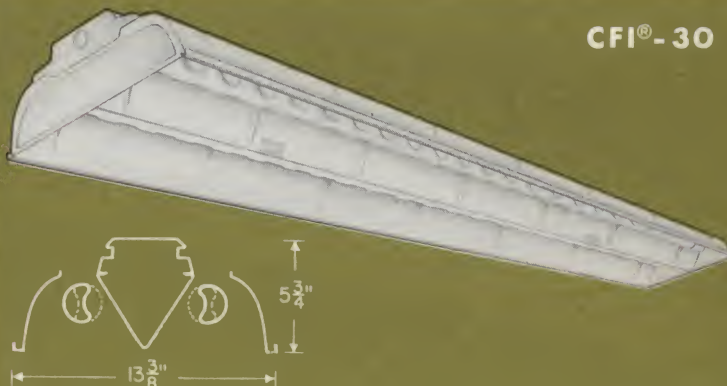

HINGED ALZAK ALUMINUM PARALOUVERS®* FOR CFI-30

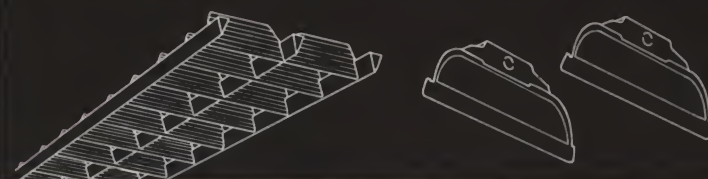


For critical seeing tasks where high intensities are required. Paralouvers accurately control distribution giving extremely low brightness in the glare zone.

| Length | Cat. No. |
|-----------------------|----------|
| 4-foot | 7978-4 |
| 8-foot | 7978-8 |
| (Two 4-foot sections) | 7978-8 |
| Fixture Ends (Pair) | 7974-P |

*Can also be used with CFI-25 Slimline and 800-MA Rapid-Start Fixtures

CFI®-15

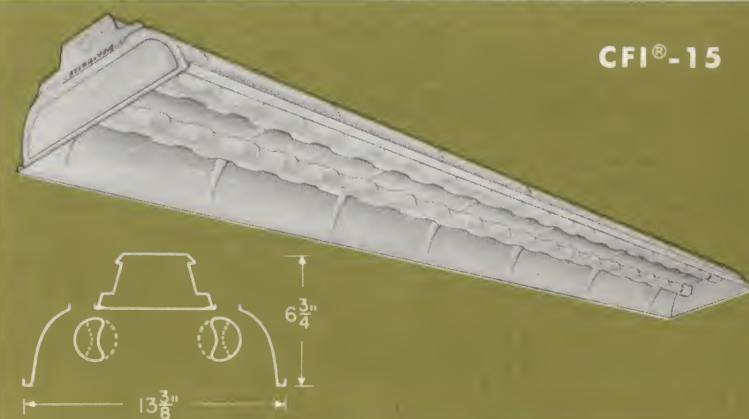


DAY-BRITE LIGHTING, INC.

ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA



INDUSTRIAL FLUORESCENT LIGHTING

CFI®-25

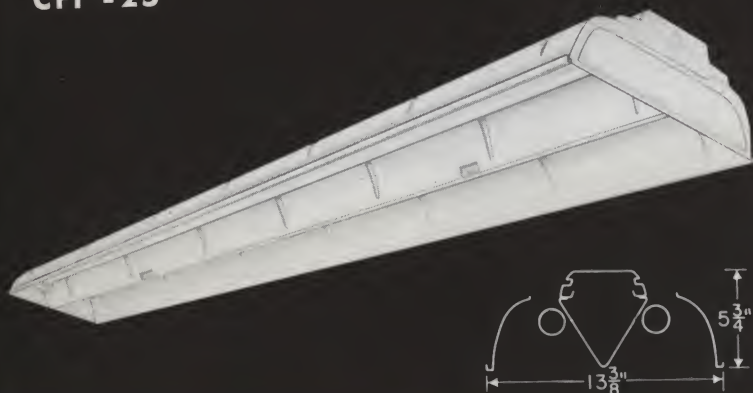

CFI®-10




Patent Nos. D-175431, D-175433, D-176367, 2317434

CFI®-10

| Description | Length | Cat. No. |
|----------------------------------------------------------|---------|----------|
| CFI-10 WITH 4-FOOT RAPID-START LAMPS | | |
| 2-Lamp complete unit | 50" | 40211-4 |
| 2-Row tandem 8-foot section with coupling, less ends | 99 1/2" | 40411-CO |
| 3-Lamp complete unit | 50" | 40311-4 |
| 3-Row tandem 8-foot section with coupling, less ends | 99 1/2" | 40611-CO |
| CFI-10 WITH 4 AND 8-FOOT SLIMLINE LAMPS | | |
| 2-Lamp complete unit | 48 1/4" | 90211-4 |
| 2-Lamp with coupling, less ends | 96" | 90211-CO |
| 3-Lamp complete unit | 48 1/4" | 90311-4 |
| 3-Lamp with coupling, less ends | 96" | 90311-CO |
| CFI-10 WITH 4 and 8-FOOT 800-MA RAPID-START LAMPS | | |
| 2-Lamp complete unit | 48 1/4" | 80211-4 |
| 2-Lamp with coupling, less ends | 96" | 80211-CO |
| 3-Lamp complete unit | 48 1/4" | 80311-4 |
| 3-Lamp with coupling, less ends | 96" | 80311-CO |
| Fixture ends (Pair) | | 7911-P |

BAKED WHITE HINGED LOUVERS FOR CFI-10

| | |
|---------------------------------------------------------|--------|
| 4-Foot (Rapid-Start Units) | 7914-4 |
| 8-Foot Slimline or H.O. Rapid-Start—Two 4-foot sections | 7915-8 |
| 4-Foot Slimline or H. O. Rapid-Start | 7915-4 |

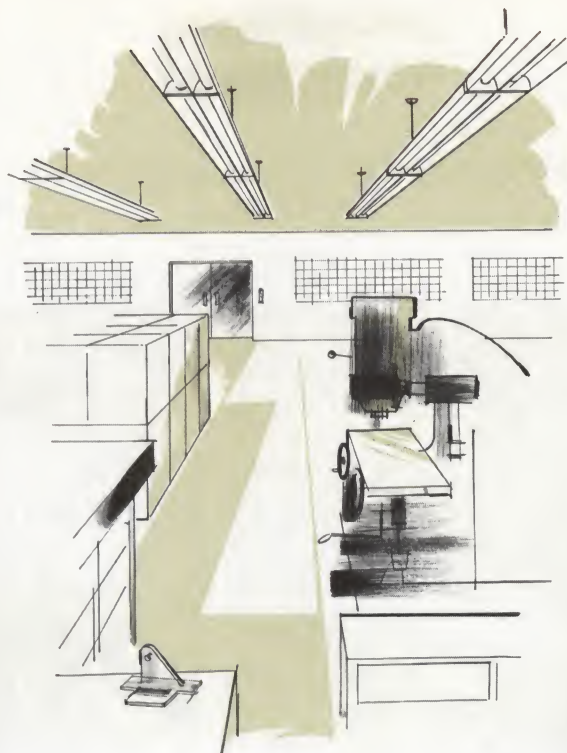


CFI®-25

Offers better shielding by virtue of longitudinal "Vee" louver, built into one-piece porcelain enamel reflector. Reflector has embossed apertures emitting 25% of light upward. Ribs assure reflector stability and add a distinctive, attractive appearance. Truss-type channel in baked gray enamel. Wired, with sockets installed and 118-volt CBM ballasts.


| For Lamps | Length | Cat. No. |
|--------------------------------|---------|-----------|
| Four-foot Rapid-Start | 50" | R-41252-4 |
| Four-foot Rapid-Start (tandem) | 99 3/4" | R-41252-8 |
| Four-foot Slimline | 48 1/4" | R-91252-4 |
| Eight-foot Slimline | 96 1/4" | R-91252-8 |
| Four-foot 800MA Rapid-Start | 48 1/4" | R-81252-4 |
| Eight-foot 800MA Rapid-Start | 96 1/4" | R-81252-8 |

BAKED WHITE HINGED LOUVERS FOR CFI-25

| | |
|-----------------------------------------------|--------|
| Four-foot (Rapid-Start Units) | 7954-4 |
| Four-foot 800MA Rapid-Start & Slimline Units | 7955-4 |
| Eight-foot 800MA Rapid-Start & Slimline Units | 7955-8 |

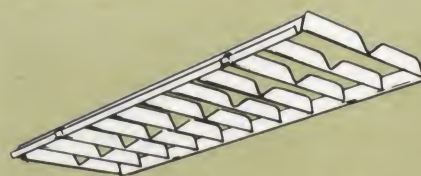

HINGED LOUVERS FOR CFI-25




HINGED LOUVERS FOR CFI-10



INDUSTRIAL FLUORESCENT LIGHTING

CFI®-20
CLEARTEX®

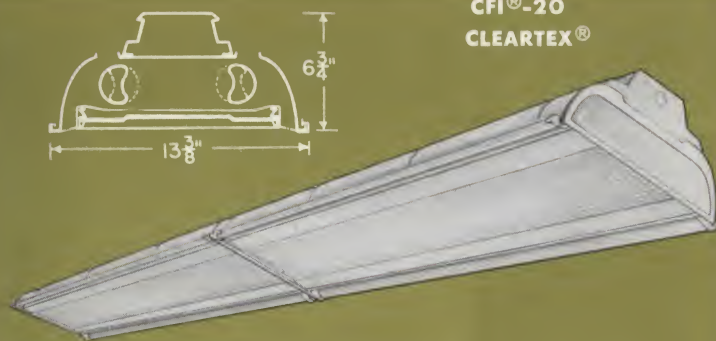

CFI®-20 CLEARTEX®

Especially shielded CFI Industrial fixtures for critical seeing tasks. Shielded with Day-Brite's exclusive Cleartex panels mounted in removable hinged frames. 23% Upward Lighting.

| For Lamps | Length | Cat. No. |
|-------------------------------------------------------------|---------|----------|
| Two 4-foot Power Groove lamps | 48 1/4" | 70240-4 |
| Two 8-foot Power Groove lamps (with coupling, less ends) | 96 1/4" | 70240-CO |
| End Plates (pair) | | 7921-P |


Patent Nos. D-175431, D-175433, D-176367, 2317434

VAPOR-TIGHT UNITS

COMPLETE SINGLE UNITS FOR USE WHERE FIXTURES ARE EXPOSED TO MOISTURE OR WHERE NON-COMBUSTIBLE DUST IS PRESENT. Ideal for Laundries, Food plants, Meat Packing plants, Bottling plants, Garages. For 4-foot Rapid-Start Lamps.

| Description | Length | Cat. No. |
|---------------------------------------------------|---------|----------|
| Two-lamp unit with double-strength clear glass | 53 7/8" | 41217 |
| Three-lamp unit with double strength clear glass | 53 7/8" | 41317 |
| Two-lamp unit with 1/8" clear Plastic (Acrylic) | 53 7/8" | 41218 |
| Three-lamp unit with 1/8" clear Plastic (Acrylic) | 53 7/8" | 41318 |
| Two-lamp unit with 1/4" clear Tuf-Flex glass | 53 7/8" | 41219 |
| Three-lamp unit with 1/4" clear Tuf-Flex glass | 53 7/8" | 41319 |


VAPOR-TIGHT

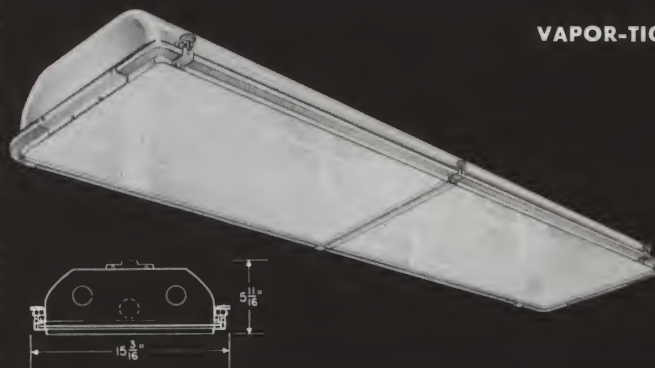

INDUSTRIAL HANGERS AND ACCESSORIES

| Catalog No. | Description |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7908-E | "A-J" Hanger for 1/2" pipe K.O. (7 1/4" long)* |
| 7924-E | "A-J" Hanger for 1/2" pipe K.O. (23 1/4" long)* |
| 7988 | HYDEE Hanger with two 5-foot chains, "S" Hooks, Cord Clips, and Receptacle (15A, 125V). For Two-Prong Parallel Blade Plug with or without grounding pin. |
| 9989 | Adapter Strap for HYDEE Hanger when used with 4-inch concrete outlet box. |
| 9952-A | ICE-TONG Hanger Clamp for 3/8" rod or mounting screws. |
| 9952-B | ICE-TONG Hanger Clamp for 1/2" conduit pipe hangers. |
| 9952-C | ICE-TONG Hanger Clamp for 3/8" iron pipe hangers. |
| 9957-A | Hanger Strap for 3/8" rod or mounting screws. |
| 9957-B | Hanger Strap for 1/2" conduit pipe hangers. |
| 9957-C | Hanger Strap for 3/8" iron pipe hangers. |
| 9953 | Cable Clamp, fits 1/2" pipe K.O. in channel top. |
| 9963 | Pair 5-foot chains with "S" Hooks. |
| 9973-2 | 6-foot 2-wire Cord and Parallel Blade Plug. |
| R-9973-3 | 6-foot 3-wire Cord and Parallel Blade Plug with Grounding Pin. (Cord Sets NOT WIRED). |

*Earthquake Approved by Los Angeles Code.




HYDEE® HANGER

Patent No. 185973



MESSENGER
CABLE CLAMP



PIVOTING
HANGER STRAP



A-J® ADJUSTABLE
HANGER

Patent No. 2446736



ICE-TONG
HANGER

Patent No. 2297869



CHAIN
HANGERS

DAY-BRITE LIGHTING, INC.


ST. LOUIS, MISSOURI • SANTA CLARA, CALIFORNIA

DAY-BRITE

**COMMERCIAL INCANDESCENT
LIGHTING**



RECESSED MOUNTED—SINGLE FACE

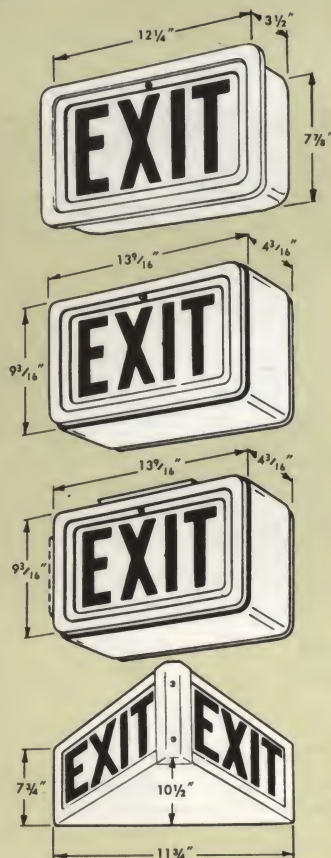

**RECESSED MOUNTED
SINGLE FACE**

**SURFACE MOUNTED
SINGLE FACE**

**TOP AND END
MOUNTED**

**TRIANGULAR
TWO FACE**

EXIT SIGNS

Cleanly designed, ruggedly constructed Exit boxes for fluorescent or incandescent lamps. All signs finished in Baked Lustre Aluminum Enamel. U/L listed. Incandescent signs include two porcelain sockets wired with 6-inch pigtailed for 25-watt A-19 lamps. Fluorescent signs are wired, with sockets installed, including starters and 118-volt ballasts for two 6-watt, F6T5 lamps.



TOP AND END MOUNTED—SINGLE FACE—GLASS BOTTOM

| Description | Catalog Numbers | | | |
|-----------------------------------------------------------------------------------------------|--------------------|----------------|--------------------|----------------|
| | Incandescent | | Fluorescent | |
| 6-inch Letters. Metal Stencil Face with Red Glass or All-Glass Face with Red Letters on White | Metal Stencil Face | All Glass Face | Metal Stencil Face | All Glass Face |
| Recessed Mounted Single Face | 3106 | 2506 | F-3106 | F-2506 |
| Surface Mounted, Single Face, Solid Bottom | 3116 | 2516 | F-3116 | F-2516 |
| Top and End Mounted, Single Face, Solid Bottom | 3146 | 2546 | F-3146 | F-2546 |
| Top and End Mounted, Double Face, Solid Bottom | 3126 | 2526 | F-3126 | F-2526 |
| Triangular, Two Face, Solid Bottom | 3136 | 2536 | | |
| Surface Mounted, Single Face, Glass Bottom | G-3116 | G-2516 | FG-3116 | FG-2516 |
| Top and End Mounted, Single Face, Glass Bottom | G-3146 | G-2546 | FG-3146 | FG-2546 |
| Top and End Mounted Double Face, Glass Bottom | G-3126 | G-2526 | FG-3126 | FG-2526 |
| Triangular, Two Face, Glass Bottom | G-3136 | G-2536 | | |

DAY-BRITE

NATION'S LARGEST MANUFACTURER OF
COMMERCIAL AND INDUSTRIAL LIGHTING EQUIPMENT

DAY-BRITE LIGHTING, INC.

ST. LOUIS 7, MISSOURI • SANTA CLARA, CALIFORNIA

Form OD-1050

Printed in U.S.A.




COMMERCIAL INCANDESCENT LIGHTING

EXIT SIGNS

Cleanly designed, ruggedly constructed Exit boxes for fluorescent or incandescent lamps. All signs finished in Baked Lustre Aluminum Enamel. U/L listed. Incandescent signs include two porcelain sockets wired with 6-inch pigtails for 25-watt A-19 lamps. Fluorescent signs are wired, with sockets installed, including starters and 118-volt ballasts for two 6-watt, F6T5 lamps.



RECESSED

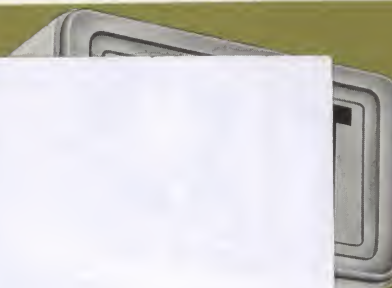

GLASS BOTTOM

Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>


From the collection of:

Mike Jackson, FAIA

Numbers

Fluorescent

| Metal encil face | All Glass Face |
|------------------------|----------------------|
| 3106 | F-2506 |
| 3116 | F-2516 |
| 3146 | F-2546 |
| 3126 | F-2526 |
| 3116 | FG-2516 |
| 3146 | FG-2546 |
| 3126 | FG-2526 |

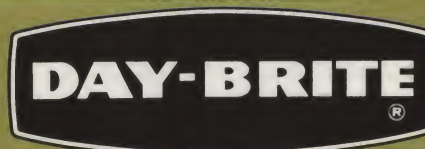

NATION'S LARGEST MANUFACTURER OF
COMMERCIAL AND INDUSTRIAL LIGHTING EQUIPMENT

DAY-BRITE LIGHTING, INC.

ST. LOUIS 7, MISSOURI • SANTA CLARA, CALIFORNIA

Form OD-1050

Printed in U.S.A.